

EVoline® Catalogue 2017



October 2017

EVOLine®

Systems

Port *Push*

35

FlipTop *Push*

63

V-Port

Dock Square

41

FrameDock

67

T-Dock

Plug

45

Dock

71

Vertical

Square80

51

R-Dock

75

Decentralised
Electrical
Distribution

Port

55

U-Dock

BackFlip

59

V-Dock

Modules

81
Modules

84
Sockets

96
Data
Modules

100
Multimedia
Modules

108
Switches &
Pushbuttons

111
Protection
Modules

114
Interchangeable
Modules

127
Kinetics

131
Express

147
Cable
Management

155
Accessories

Add-On

EVoline® Port *Push*

NEU
NOUVEAU
NEW



DESIGN
AWARD
2017




The retractable rectangular solution

EVOLine[®] Port *Push*

The EVOLine Port Push fits virtually flush with the work surface.

By using the Push-To-Open function, the housing is released and appears above the work surface, enabling an easy pull up to connect power and data cables. With a light press of a finger, it retracts with connected leads. Slide dampers ensure a soft closing. The patented rocking cover enables a space-saving cable routing through the desk.

The Port Push modules can be assembled to customer's needs. The interchangeable data and multimedia modules allow greater flexibility, enabling future proof technology with ever changing usage requirements.

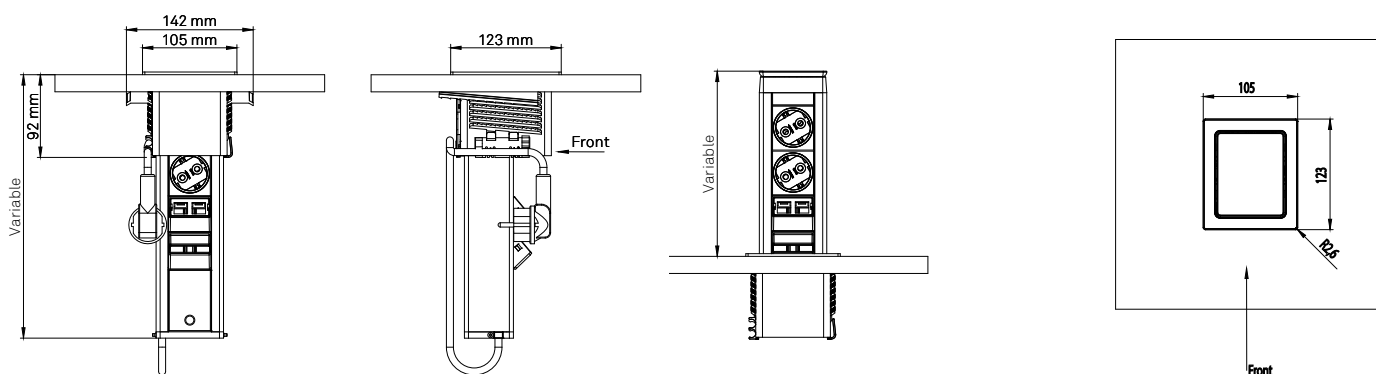

Push-Function facilitates the opening

Individual surfaces



Brushed Stainless Steel



Glass, black



Glass, white

International
power socket modules





USB-Charger:
Charges all common
devices with
USB connection

Bespoke assembly with
interchangeable modules
to meet your requirements




EVoline® Port *Push*

Description	Picture	Specifications	Order Number
<p>EVoline Port <i>Push</i></p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0300
<p>EVoline Port <i>Push</i></p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0400

Description	Picture	Specifications	Order Number
<p>EVoline Port <i>Push</i> Cuisine</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0100
<p>EVoline Port <i>Push</i> Cuisine Charger</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 1 × USB-Charger Type A* 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0200
<p>EVoline Port <i>Push</i> DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. 2 × modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected. Fixed supply cable 3.0 m with angled plug.</p>		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0500

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market

EVoline® Port *Push*

Description	Picture	Specifications	Order Number
EVoline Port <i>Push</i> CHARGER Aluminium housing, silver anodised. For surface thickness up to 50 mm. 2 × USB- Charger Typ A* 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0600

EVoline® Port *Push* Individual

Empty Housing EVoline Port <i>Push</i> Aluminium housing, silver anodised. For surface thickness up to 50 mm.		Cover and collar in black plastic with brushed stainless steel inlay	9332 0040 0000
		Cover and collar in black plastic with frosted white glass inlay	9332 1020 0000
		Cover and collar in black plastic with glossy black glass inlay.	9332 1030 0000

Cover options



Brushed Stainless Steel



Glass, glossy black



Glass, frosted white

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market

EVoline[®] Dock Square

NEU
NOUVEAU
NEW



Variable and mobile.

EVoline[®] Dock Square

EVoline Dock Square, the new generation of on-Desk systems, provides a mobile, compact and flexible solution for the workspace.

Starting with the Dock Square Basic up to the individually configurable versions, interchangeable modules for Data and Multimedia facilitate timeless and almost unlimited flexibility as connectivity requirements evolve.

An easy adhesive fixing simplifies the installation. The adhesive connection is removable at any time enabling the Dock Square to be placed in another position. Even on Glass!



International socket modules



Fast fixing and removal



with double sided strips






Cable connections are easily accessible.

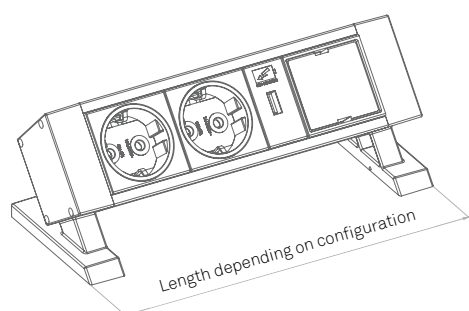

Simple cable-routing.



Individually configurable with interchangeable modules.
Easy and fast exchange of modules.

Description	Picture	Specifications	Order Number
<p>EVOLine Dock Square</p> <p>Aluminium housing. 2 × VDE Sockets 0°, 16 A 1 × USB-Charger Type A Output Voltage: 5V_{DC} Rated Output Current: 1 A 1 × Installation Space for interchangeable modules 2 × Double sided strips. Fixed supply cable 1 m with GST18 plug</p> <p>Dimensions (W × H × D): 220 × 85 × 87 mm</p>		Silver anodised	1593 8000 0100
<p>Empty Housing EVOLine Dock Square</p> <p>Aluminium housing.</p> <p>A variety of modules is available. Please look up in the chapter „EVOLine Modules“</p>		Housing	
		Silver anodised	9332 0720 0000
		Black anodised	9332 0730 0000
		White powder coated	9332 1170 0000
<p>Double Sided Strips for EVOLine Dock Square</p> <p>2× Double sided strips</p>			1993 1170 0000


*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.



EVoline[®] Plug



reddot design award
winner 2011



Ausgezeichnet mit dem 1. Preis
Universal Home: Product Design
1. Designpreis des Landes
Nordrhein-Westfalen



Designpreis
Deutschland
2011
NOMINIERT



Ausgezeichnet with der
IENA Goldmedaille



2012

Extremely thin. Fits behind any cupboard or cabinet. Prevents tripping hazards.


EVoline® Plug

The EVoline Plug's ultra-low profile easily fits behind any piece of furniture. The intelligent joint mechanism transforms the handle into a lever – and the plug can be easily removed from the socket. Even in case of a pull on the cable, the plug is released without damage.

EVoline Plug Fix as flat plug solution for manufacturers cannot be dismantled. Our range offers versions with endsplices, couplings, 3-gang socket rail or connectors.



reddot design award
winner 2011



Ausgezeichnet mit dem 1. Preis
Universal Home: Product Design
Designpreis des Landes
Nordrhein-Westfalen



Designpreis
Deutschland
2011
NOMINIERT



interior
innovation
award
2011
Winner




Ausgezeichnet with der
IENA Goldmedaille




universal
design
award 2010



universal
design
consumer
favorite 2010



EVoline® Plug



EVoline® PlugFix

Description	Picture	Specifications	Order Number
EVOnline Plug Screwable ultra-low profile Grounded plug with movable face, for wire diameters of 0.75 mm² to 1.5 mm², 250 V / 16 A		black white	1510 0000 0100 1510 0000 0300
EVOnline PlugFix with EVOnline Express Typ 907 with cable 3 × 1.5 mm² connected to 3 gang power bar EVOnline Express, 250 V / 16 A		black, with 1.5 m Cable white, with 1.5 m Cable	1510 0015 6100 1510 0015 6300
EVOnline PlugFix with VDE socket coupling with cable 3 × 1.5 mm² connected to socket coupling with contact protection, 250 V / 16 A		black, with 3 m Cable white, with 3 m Cable black, with 1.5 m Cable white, with 1.5 m Cable	1510 0030 5100 1510 0030 5300 1510 0015 5100 1510 0015 5300
EVOnline PlugFix with connector with cable 3 × 1.5 mm² and connector. Select from Wieland GST18 or WAGO WINSTA sockets.		Wieland GST 18i3 black 1.5 m Cable and socket WAGO WINSTA black 1.5 m Cable and socket	1510 0015 2100 1510 0015 8100
EVOnline PlugFix with wire end ferrules With fixed cable 3 × 1.5 mm² with wire end ferrules. 250 V / 16 A,		black, with 1.5 m Cable white, with 1.5 m Cable	1510 0015 1100 1510 0015 1300



EVoline[®] Square80







Innovative technology for the smallest of spaces.

EVoline[®] Square80

EVoline Square80 fits into standard openings that are pre-made with a diameter of 80 mm. It provides a power socket, a USB charger, and a data connection.

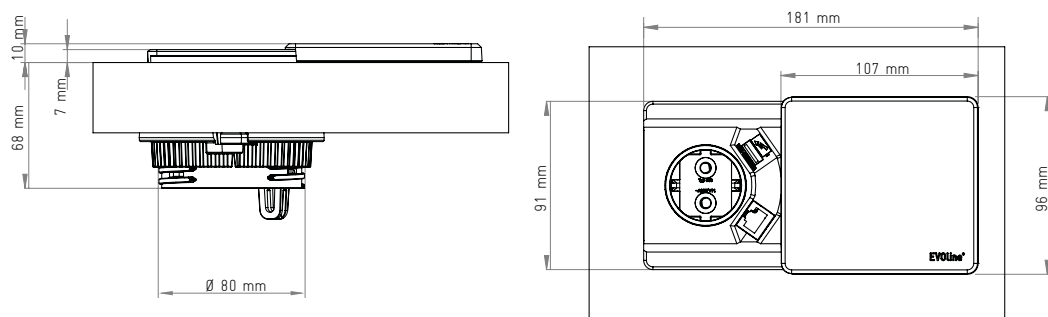


In its Qi version EVoline Square80 offers an additional inductive charging surface integrated into the cover, for charging of Qi capable mobile phones.



Description	Picture	Specifications	Order Number
<p>EVoline Square80</p> <p>For surface thickness up to 50 mm. Mounting hole ø 80 mm.</p> <p>Configuration: 1x VDE-socket, 16 A, contact protected 1x USB Charger Type A *, Output voltage: 5V DC Rated output current: 1A,</p> <p>Fixed supply cable 3 m with angled plug.</p>		Cover and housing black	
		CAT 6 Socket	1592 7000 0100
		3,0 m Cable and plug	
		3.0 m pull out CAT 6 patch cable	1592 7000 0200
		2x USB Charger	1592 7001 6300
		without data	1592 7000 0300
		Cover and housing white	
		CAT 6 Socket	1592 7000 1900
		3,0 m Cable and plug	
		3.0 m pull out CAT 6 patch cable	1592 7000 2000
		2x USB Charger	1592 7001 6400
		without data	1592 7000 2100
		Cover in stainless steel optics housing in black	
		CAT 6 Socket	1592 7000 3100
		3.0 m Cable and plug	
		3.0 m pull out CAT 6 patch cable	1592 7000 3200
		2x USB Charger	1592 7001 6500
		without data	1592 7000 3300

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

EVOLine® Square80

Description	Picture	Specifications	Order Number
<p>EVOLine Square80 with Qi Charger</p> <p>For surface thickness up to 50 mm. Mounting hole ø 80 mm.</p> <p>Configuration: 1x VDE-socket, 16 A, contact protected 1x USB Charger Type A *, Output voltage: 5V DC Rated output current: 1A,</p> <p>Fixed supply cable 3 m with angled plug.</p>		Cover and housing black	
		3,0 m Cable and plug CAT 6 Socket	1592 7000 0400
		3,0 m pull out CAT 6 patch cable	1592 7000 0500
		without data	1592 7000 0600
		Cover and housing white	
		3,0 m Cable and plug CAT 6 Socket	1592 7000 2200
		3,0 m pull out CAT 6 patch cable	1592 7000 2300
		without data	1592 7000 2400
		Cover in stainless steel optics housing in black	
		3,0 m Cable and plug CAT 6 Socket	1592 7000 3400
		3,0 m pull out CAT 6 patch cable	1592 7000 3500
		without data	1592 7000 3600



* Die Ladefunktion des USB-Chargers kann auf Grund der Vielzahl der Anbieter und Geräte nicht in jedem Fall garantiert werden.

EV0line® Port




reddot
design award

The retractable solution

EVoline® Port

EVoline Port let sockets and cables simply disappear. Just the collar and cover of the Port are visible on the work surface.

The easy pull-up motion let the high-quality aluminium body appear and subsequently a push-down motion let it disappear below the surface even with attached plugs. The patented rocking cover creates enough space for a cable outlet.

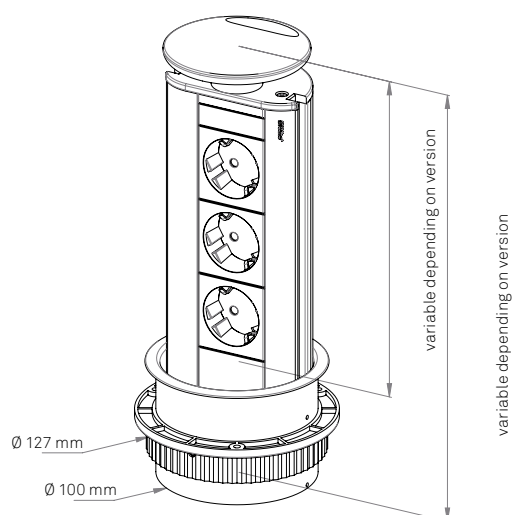

Silver
lacquered plastics



Stainless steel
in CD-Optics



White
lacquered plastics





Black
lacquered plastics





Chrome-plated
steel






Antique brass
lacquered plastics


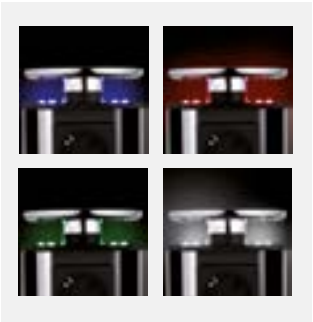
Description	Picture	Specifications	Order Number
EVoline Port Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1000 3300
		Rocking cover and collar made of black lacquered plastic	1593 1000 5200
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1003 1100
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch	1593 1003 1200
EVoline Port Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.		Rocking cover and collar made of silver lacquered plastic	1593 1000 0100
		Rocking cover and collar made of black lacquered plastic	1593 1000 5000
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	1593 1002 1600
		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch	1593 1003 1300

Description	Picture	Specifications	Order Number
<p>EVoline Port Cuisine</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Rocking cover made of silver lacquered plastic, Collar made of grey plastic</p>	1593 1000 0600
<p>EVoline Port DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p>	<p>1593 1003 1400</p> <p>1593 1003 1500</p> <p>1593 1003 1600</p> <p>1593 1003 1700</p>

Description	Picture	Specifications	Order Number
<p>EVoline Port DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p>	<p>1593 1003 1800</p> <p>1593 1003 1900</p> <p>1593 1003 2000</p> <p>1593 1003 2100</p>
<p>EVoline Port USB CHARGER*</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p> <p>1x USB Type A Charger, rated output current: 1 A</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1040 0200</p> <p>1593 1040 0300</p> <p>1593 1040 0400</p>
<p>EVoline Port 2x USB CHARGER</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p> <p>2x USB Type A Charger, rated output current: 1 A</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1038 4100</p> <p>1593 1038 7100</p> <p>1593 1038 7200</p>

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

Description	Picture	Specifications	Order Number
<p>Empty Housing EVoline Port</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>9330 1830 0000</p> <p>9330 1360 0000</p>
<p>Empty Housing EVoline Port CLASSIC</p> <p>Aluminium housing, plated inn antique brass colour. For surface thickness up to 50 mm. Mounting hole ø 102 mm</p>		<p>Rocking cover and collar made of antique brass lacquered plastic</p>	<p>9330 2710 0000</p>
<p>Empty Housing EVoline Port CHROME</p> <p>Chrome plated aluminium housing. For surface thickness up to 50 mm. Mounting hole ø 102 mm.</p>		<p>Rocking cover made of chromed steel, collar made of black lacquered plastic</p>	<p>9330 2750 0000</p>

Description	Picture	Specifications	Order Number
<p>Empty Housing EVoline Port BLACK</p> <p>Aluminium housing, black anodised. For surfaces thickness up to 50 mm. Mounting hole ø 102 mm.</p>		Rocking cover and collar made of black lacquered plastic	9330 5560 0000
<p>Nightlight LED Modul</p> <p>For all EVoline Ports LEDs underneath rocking cover</p>		<p>Light colour: night blue</p> <p>Light colour: ruby red</p> <p>Light colour: emerald green</p> <p>Light colour: soft white</p>	<p>9330 3830 0000</p> <p>9330 3840 0000</p> <p>9330 5790 0000</p> <p>9331 0260 0000</p>

Configuration examples



A variety of modules is available for the equipment. Please see the Chapter „Modules“

Technical changes and printing errors reserved. | Similar pictures.

EV0line® BackFlip



reddot design award
winner 2015



GERMAN
DESIGN
AWARD
NOMINEE
2016







Enhanced protection for the home.

EVoline® BackFlip

The EVolineBackFlip sits nearly flush on the work surface - when closed - the giving enhanced protection against liquid spillages. At a touch of a finger, it turns 180 degrees to reveal 2x power sockets and a USB charger.

The raised position provides further protection against spillages. With a total installation height of just 53 mm, the BackFlip can be fitted above most drawers, including a cutlery drawer.

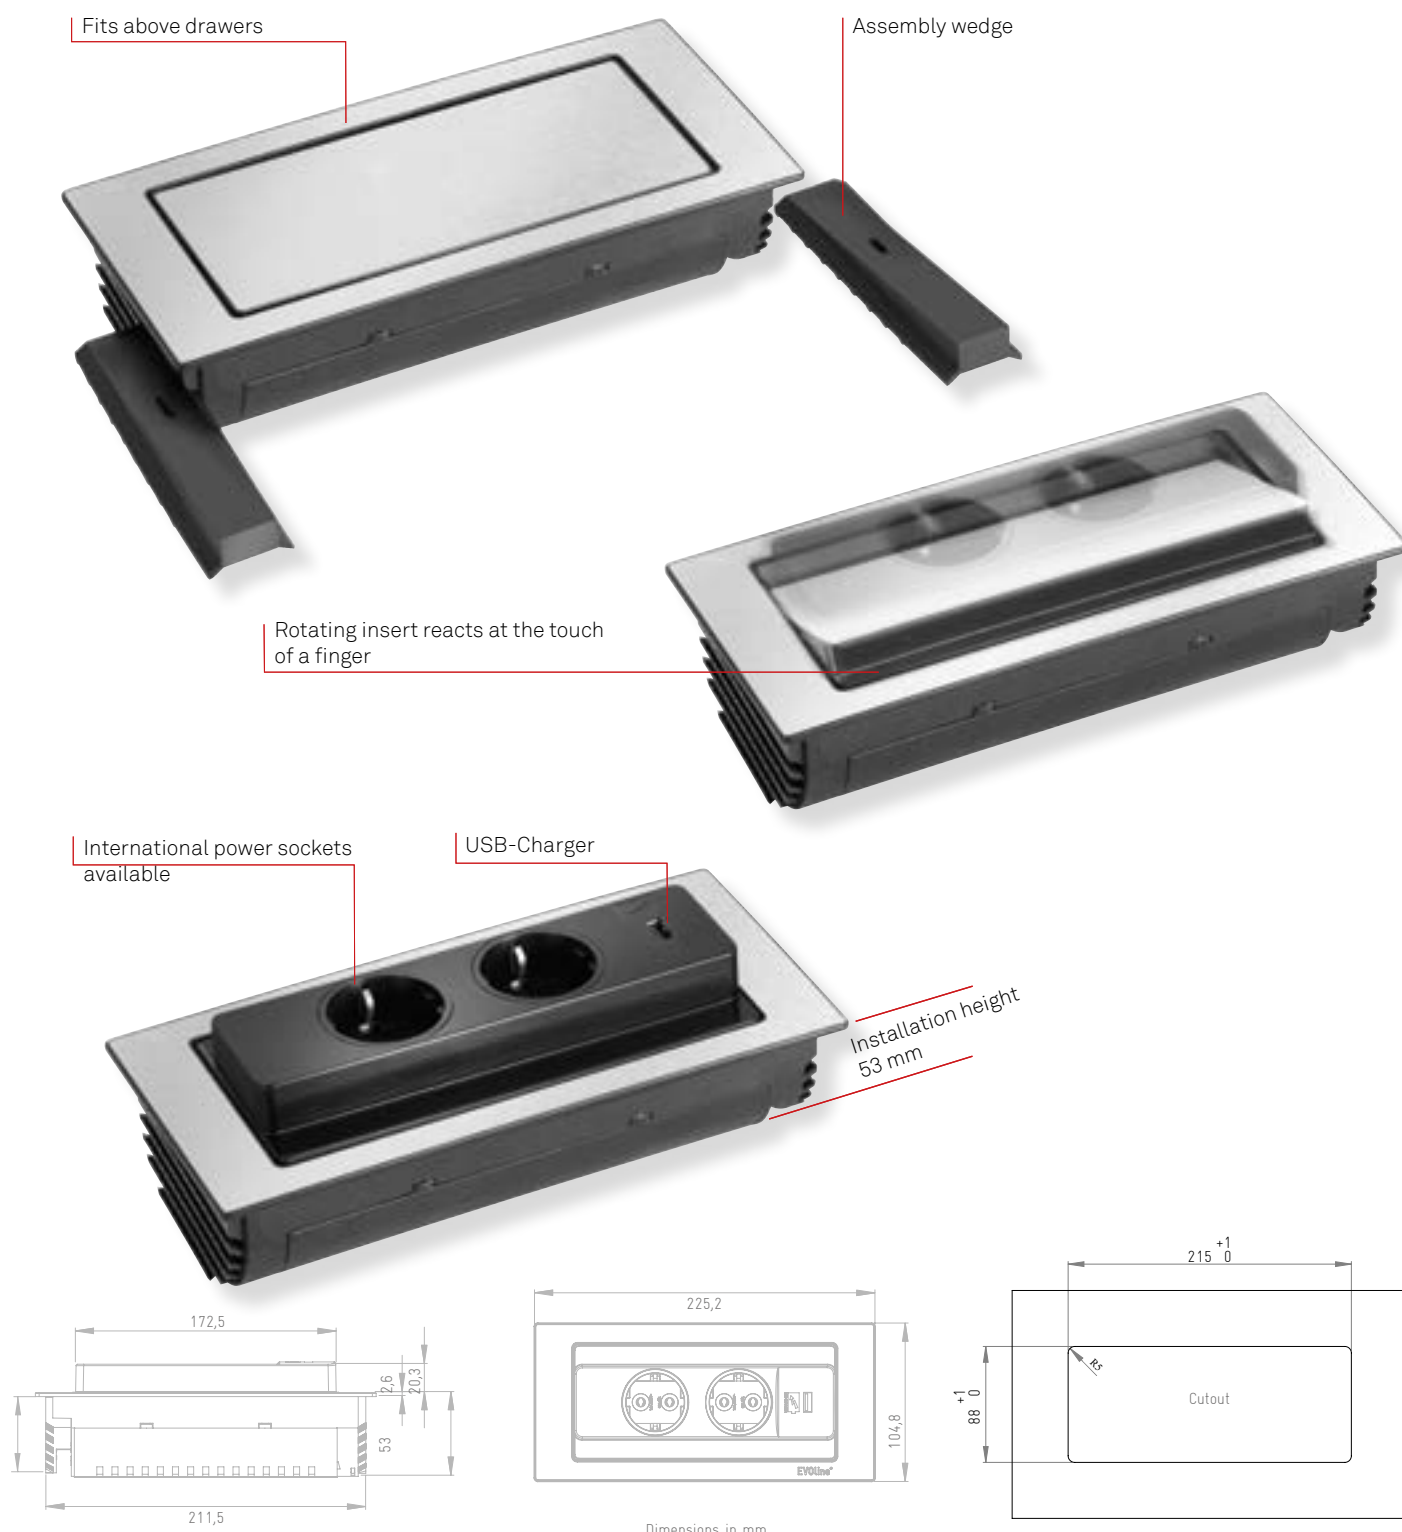

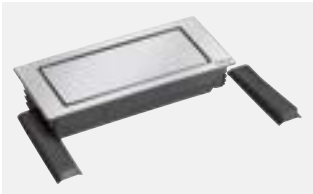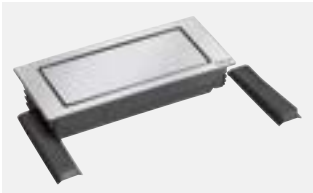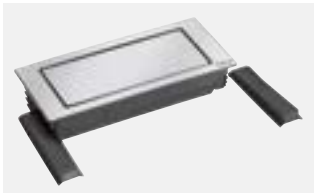Description	Picture	Specifications	Order Number
EVoline BackFlip For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 3.0 m with angled plug.		Decor: Brushed Stainless Steel	1592 7100 0200
		Decor: Glass, frosted white	1592 7100 2000
		Decor: Glass, glossy black	1592 7100 2100
		Decor: matt white lacquered	1592 7100 5000
		Decor: matt black lacquered	1592 7100 5100
EVoline BackFlip mit EVoline PlugFix For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 3.0 m with EVoline PlugFix.		Decor: Brushed Stainless Steel	1592 7100 0900
		Decor: Glass, frosted white	1592 7100 2200
		Decor: Glass, glossy black	1592 7100 2300
EVoline BackFlip CUISINE mit Schutzkontaktstecker For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 2.5 m Plug supplied unattached		Decor: Brushed Stainless Steel	1592 7100 0100
		Decor: Glass, frosted white	1592 7100 1800
		Decor: Glass, glossy black	1592 7100 1700
		Decor: matt white lacquered	1592 7100 5200
		Decor: matt black lacquered	1592 7100 5300

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

Surface variants



Brushed stainless steel



Steel: matt black lacquered



Glass: glossy black



Steel: matt white lacquered



Glass: frosted white

EVoline® FlipTop *Push*



A touch of a finger is sufficient.

EVoline® FlipTop *Push*


The FlipTop Push is an elegant solution supplying all work areas with power, data and multimedia.

Interchangeable modules for data and multimedia ensure unlimited flexibility for future requirements at the workspace.


Push-to-open function.
Final open position with manual
locking mechanism allows
easy insertion of plugs.



Quick installation

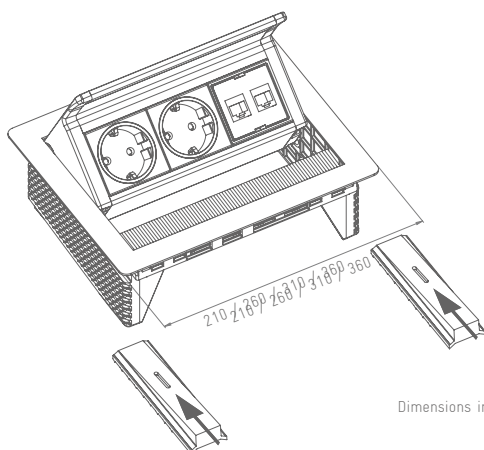


Dimensions in mm

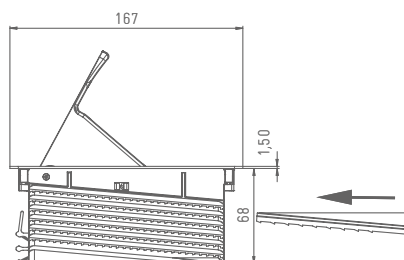

International power socket modules



Simple and quick exchange of modules. Customisable with interchangeable modules.



Flexible,
exchangeable
cable outlet
module

Quick installation,
for surface thickness
up to 50 mm





Adaptor clip for safe
connection to WireLane





Convenient cable routing
ensures tidiness below
the table









EVoline® FlipTop Push

Description	Picture	Specifications	Order Number
<p>EVoline FlipTop Push S</p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 4900
<p>EVoline FlipTop Push Data S</p> <p>Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 8100

Description	Picture	Specifications	Order Number
<p>EVOLine FlipTop Push M</p> <p>4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium,</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7000 2700
<p>EVOLine FlipTop Push Data M</p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 245 mm</p>		<p>Housing made of black anodised aluminium,</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7000 0200

EVoline® FlipTop Push Individual

Description	Picture	Specifications	Order Number
Empty Housing FlipTop Push S For 3 modules Housing made of black anodised aluminium, Installation dimensions: 157 × 195 mm		Cover and frame top made of brushed stainless steel	9331 8010 0000
		Cover and frame top black powder-coated	9331 9360 0000
		Cover and frame top white powder-coated	9331 9630 0000
Empty Housing FlipTop Push M For 4 modules Housing made of black anodised aluminium, Installation dimensions: 157 × 245 mm		Cover and frame top made of brushed stainless steel	9331 8020 0000
		Cover and frame top black powder-coated	9331 9370 0000
		Cover and frame top white powder-coated	9331 9640 0000
Empty Housing FlipTop Push L For 5 modules Housing made of black anodised aluminium, Installation dimensions: 157 × 295 mm		Cover and frame top made of brushed stainless steel	9331 8030 0000
		Cover and frame top black powder-coated	9331 9380 0000
		Cover and frame top white powder-coated	9331 9650 0000
Empty Housing FlipTop Push XL For 6 Modules Housing made of black anodised aluminium, Installation dimensions: 157 × 345 mm		Cover and frame top made of brushed stainless steel	9331 8040 0000
		Cover and frame top black powder-coated	9331 9390 0000
		Cover and frame top white powder-coated	9331 9660 0000
EVoline WireLane Adaptor To connect WireLane to FlipTop Push.		black	1599 0910 3300
EVoline FlipTop Push TRAY black powder-coated. For protection and cover below the table. Also applicable as cable tray.		for FlipTop Push S	9331 9100 0000
		for FlipTop Push M	9331 9110 0000
		for FlipTop Push L	9331 9120 0000
		for FlipTop Push XL	9331 9130 0000

EVOLine® FrameDock






A flexible modular system for various applications.



EVoline[®] FrameDock

EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:

High quality design, customisable components and yet discreet.

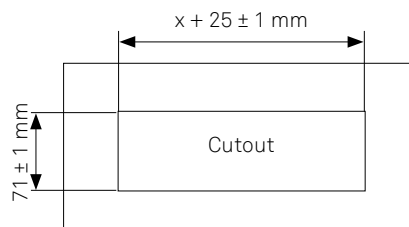
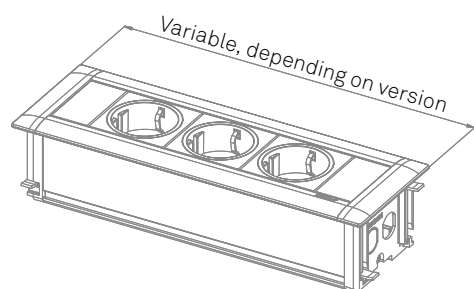


Examples of power supply options:


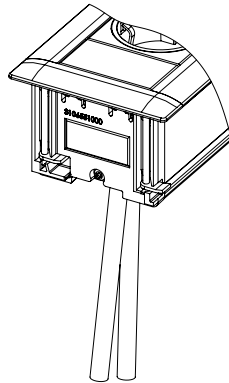
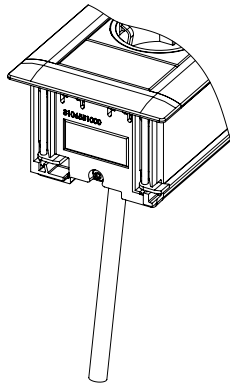


Fixed Power Supply Cable
through the bottom of the profile

Available with several country
specific plugs, with wire end
ferrules, Wieland GST 18i3, or
WAGO WINSTA Connector



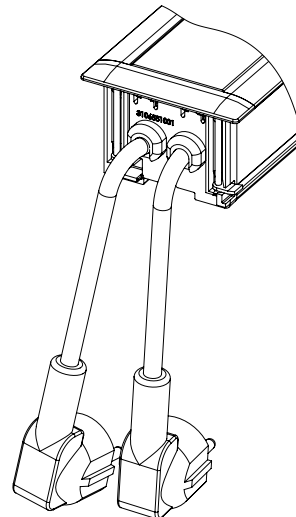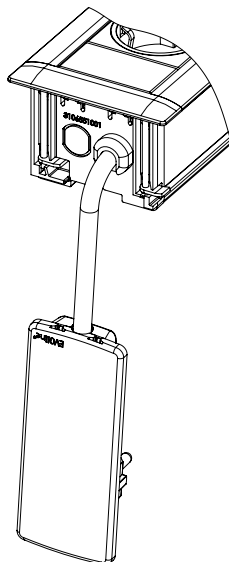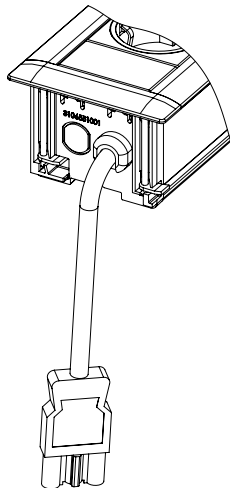


End cap with power input or out-
put connector, depending on the
surface thickness (max. 18 mm)



End cap with fixed power supply
cable, depending on the surface
thickness (max. 18 mm)

Available with several country
specific plugs, EVoline Plug,
wire end ferrules, GST 18- or
WAGO WINSTA connector.

Description	Picture	Specifications	Order Number
EVoline FrameDock SMALL Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Powersupply cable entry left side in the bottom of the profile.		Profile silver anodised Screw covers black plastic	1596 1000 0900
		Profile black Screw covers black plastic	1596 1001 9500
		Profile white Screw covers white plastic	1596 1001 7900
EVoline FrameDock DATA SMALL Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.		Profile silver anodised Screw covers black plastic	1596 1000 1000
		Profile black Screw covers black plastic	1596 1001 9600
		Profile white Screw covers white plastic	1596 1001 8000
Empty Housing FrameDock For surface thickness up to 38 mm		Profile silver anodised Screw covers black plastic	9331 2180 0000
		Profile Silver anodised; Screw covers silver lacquered plastic	9331 2550 0000
		Profile black anodised Screw covers black plastic	9331 5330 0000
		Profile white powder-coated Screw covers white plastic	9331 3540 0000

Configuration examples



EVoline[®] Dock




Above desk quality for home, office, hotel.



EVoline[®] Dock

EVoline Dock sits above the desk allowing maximum workspace. Various fixing options are available like EVoline Quicklock, clamps, pillars, etc.

The configurable charging and data station can be equipped with the complete EVoline Modules range.

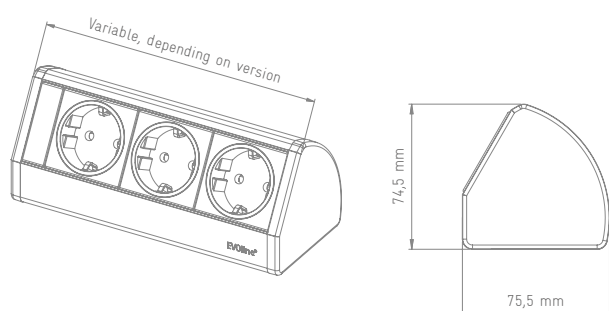



Examples of power supply options:

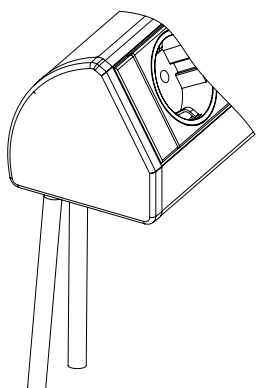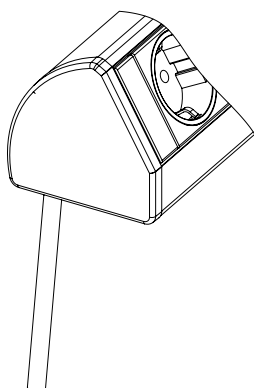

Fixed Power Supply Cable through the bottom of the profile




Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

Color of the end caps painted to match the profiles color.



End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)

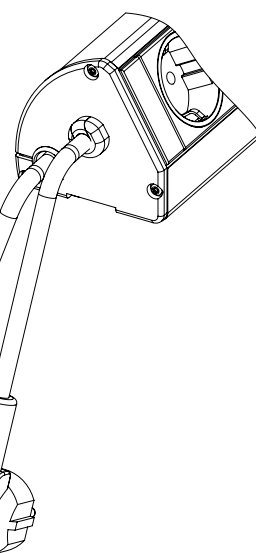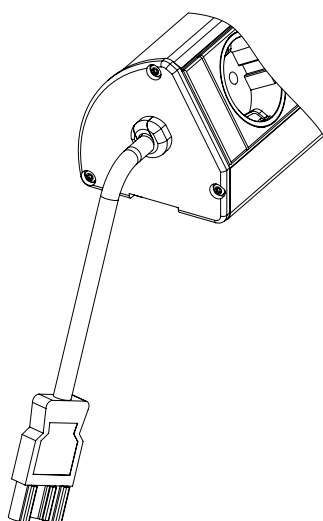


End cap colour: black



End cap with fixed power supply cable.





Available with several country specific plugs, EVOLine Plug, wire end ferrules, GST 18 or WAGO WINSTA Connector.

Color of the end caps: black

Description	Picture	Specifications	Order Number
<p>EVOLine Dock CUISINE</p> <p>Aluminum housing, anodised in colour stainless steel (ALANOX®) End caps lacquered to match the frame color, supplied unattached. Outlet receptacles painted to match the color profile. 3× VDE sockets with 2.5 m supply cable with wire end ferrules. VDE plug supplied unattached. Mounting set for under desk installation attached.</p>		<p>Stainless steel anodised (ALANOX®)</p>	<p>1593 0368 3600</p>
<p>EVOLine Dock DESK</p> <p>Aluminium housing, free positioning with provided slide stops. 3 sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>White powder-coated</p>	<p>1593 0004 0300</p> <p>1593 0004 0100</p> <p>1593 0004 0700</p>
<p>EVOLine Dock DESK DATA</p> <p>Aluminium housing, free positioning with provided slide stops. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>White powder-coated</p>	<p>1593 0047 8300</p> <p>1593 0047 8100</p> <p>1593 0047 8700</p>

Description	Picture	Specifications	Order Number
EVoline Dock SMALL		With 2 mounting clamps for surfaces thickness 8 – 40mm	
Aluminium housing. 3 sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry left side in the bottom of the profile.		Silver anodised	1593 0066 6300
		Black anodised	1593 0066 6100
		White powder-coated	1593 0066 6700
		Without mounting clamps	
		Silver anodised	1593 0003 9300
		Black anodised	1593 0003 9100
		White powder-coated	1593 0003 9700
EVoline Dock DATA SMALL		With 2 mounting clamps for surfaces thickness 8 – 40mm	
Aluminium housing, 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.		Silver anodised	1593 0066 2300
		Black anodised	1593 0066 2100
		White powder-coated	1593 0066 2700
		With QuickLock Pro 150 mm	
		Silver anodised	1593 0394 4300
		Black anodised	1593 0394 4100
		White powder-coated	1593 0394 4700
		Without mounting clamps	
		Silver anodised	1593 0047 7300
	Black anodised	1593 0047 7100	
	White powder-coated	1593 0047 7700	

EVoline® Dock

Description	Picture	Specifications	Order Number
Empty Housing EVoline Dock BLACK Aluminium housing Cable entry through end cap or profile.		Black anodised	9330 1811 0000
Empty Housing EVoline Dock SILVER Aluminium housing Cable entry through end cap or profile.		Silver anodised	9330 1810 0000
Empty Housing EVoline Dock STAINLESS Aluminium housing Cable entry through end cap or profile.		Stainless steel alike anodised (ALANOX®)	9330 8450 0000
Empty Housing EVoline Dock WHITE Aluminium housing Cable entry through end cap or profile.		White powder-coated End caps plastic laquered to match (in case cable entry through the profile)	9331 3530 0000

Configuration examples:



EVOnline[®] R-Dock




Contemporary and modern for all workspaces.



EVoline[®] R-Dock

EVoline R-Dock can be installed into any right-angled corner.

With its flat back and angled front fascia, it is comfortable to use. Freely configurable.


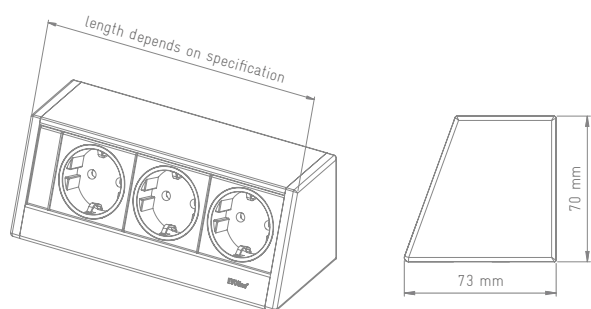


Examples of power supply options:


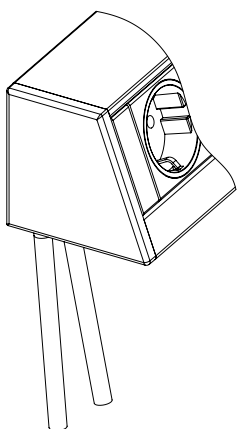
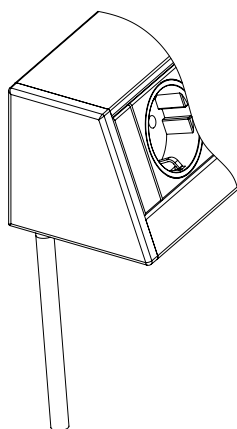


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector



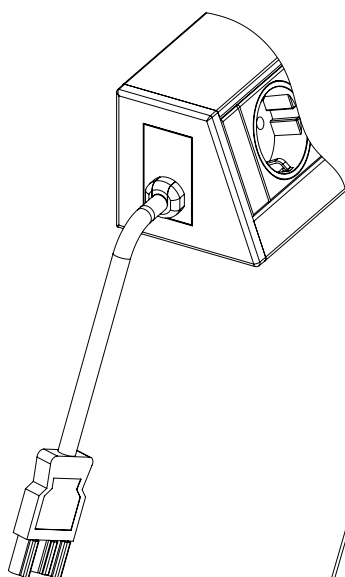

End cap with power input or output connector, depending on the surface thickness (max. 18 mm)





End cap with fixed power supply cable

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

EVoline® R-Dock

Description	Picture	Specifications	Order Number
EVoline R-Dock SMALL* Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry on the left side in the bottom of the profile.		Silver anodised White powder-coated	1598 0000 1700 1598 0000 8600
EVoline R-Dock DATA SMALL* Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.		Silver anodised White powder-coated	1598 0000 1800 1598 0000 8700

EVoline® R-Dock Individual

Empty Housing EVoline R-Dock* Aluminium housing. Power supply cable entry through end cap or profile.		Silver anodised	9331 0620 0000
Empty Housing EVoline R-Dock* Aluminium housing. Power supply cable entry through end cap or profile.		White powder-coated End caps lacquered to match housing colour (if cable entry is through the profile)	9331 4340 0000

* Delivery without mounting accessories.

A variety of modules is available. Please look up in the chapter „EVoline Modules“

EV0line® U-Dock





Underdesk. Robust. Save.



EVoline[®] U-Dock

EVoline U-Dock can be mounted to any work surface in various ways.




As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.

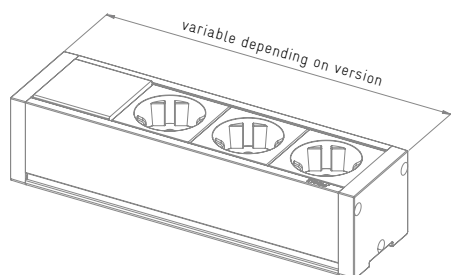

Examples of power supply options:





End cap with power input and/or output connector.

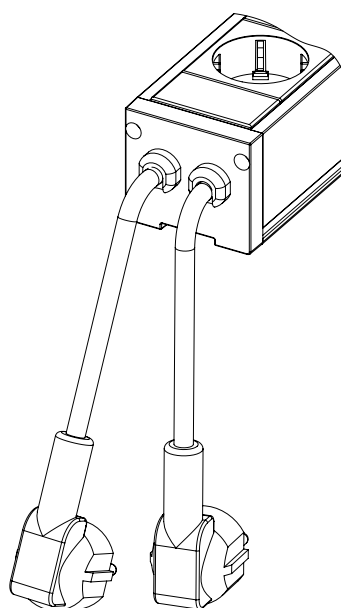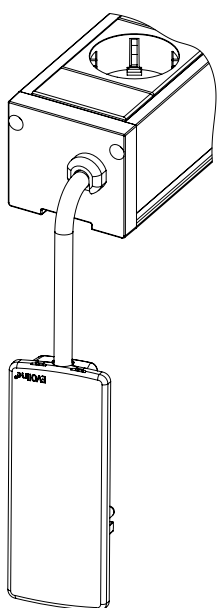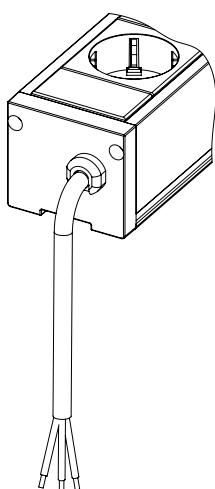

End cap with fixed power supply cable.

Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

End cap colour: black



All above mentioned U-Dock end caps are available with or without mounting angles.

EVoline® U-Dock

Description	Picture	Specifications	Order Number
EVoline U-Dock SMALL Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket.		Silver anodised with mounting angles	1596 0000 9500
		Silver anodised without mounting angles	1596 0000 9600
EVoline U-Dock DATA SMALL Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Entry for data cables in the opposite end cap.		Silver anodised with mounting angles	1596 0000 5900
		Silver anodised without mounting angles	1596 0000 3300

EVoline® U-Dock Individual

Empty Housing EVoline U-Dock Aluminium housing		Silver anodised	9330 8510 0000
		End caps optionally with or without mounting angles	

Configuration Examples:



EVOLine® V-Dock




Space saving.

EVoline® V-Dock


The EVoline V-Dock gives dead corners a benefit.

It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.




Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.



Examples for power supply of the V-Docks:

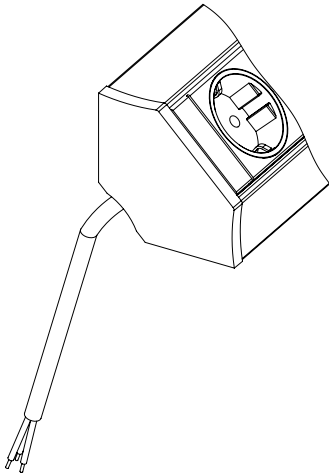

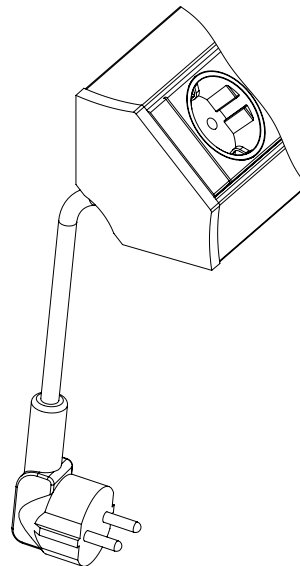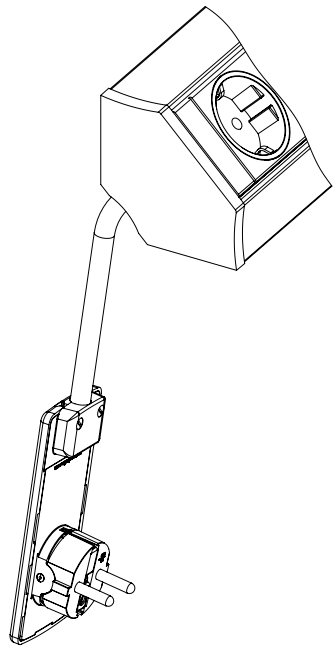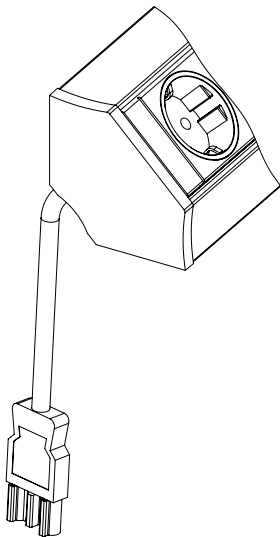

Fixed power supply cable
in the bottom of the profile with
wire end ferrules.



Fixed power supply cable
in the bottom of the profile

Available with several country
specific plugs, EVOLine Plug,
Wieland GST 18i3 or
WAGO WINSTA Connector

EVoline® V-Dock

Description	Picture	Specifications	Order Number
<p>EVoline V-Dock CUISINE</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p> <p>Incl. profile bracket 100 mm.</p>		Silver anodised	1593 6000 1300
<p>EVoline V-Dock DATA SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 3 m with angled plug.</p> <p>Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected.</p> <p>Incl. 2 profile brackets 100 mm.</p>		Silver anodised	1593 6000 2300

EVoline® V-Dock Individual

<p>Empty housing EVoline V-Dock</p> <p>Aluminium housing</p> <p>From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.</p>		Silver anodised	9330 5600 0000
<p>Empty housing EVoline V-Dock</p> <p>Aluminium housing</p> <p>From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.</p>		Black anodised	9331 5850 0000

A variety of modules is available. Please see the Chapter „Modules“

EVoline® V-Port



reddot design award
winner 2015




Connectivity for corners everywhere.

EVoline[®] V-Port

In kitchens, you often find unused space underneath a wall cabinet, in corners and next to tall cupboards. This is where the EVoline V-Port can be installed.


In its closed position, the V-Port is concealed behind a discreet and elegant aluminium cover in stainless steel optics. A gentle touch releases a multiple socket rail. As option available with USB charger.

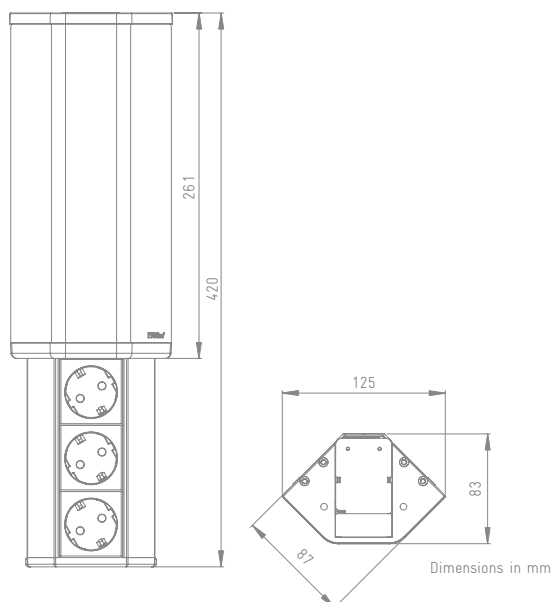

Quick mounting,
Easy connection
via special connector



EVoline VDE Plug
is standard



Soft Touch
release



International
power socket
versions available

USB-Charger
optional

Description	Picture	Specifications	Order Number
<p>EVoline V-Port 2-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		Aluminum cover in stainless steel optics	1593 4500 0200
<p>EVoline V-Port 3-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 3× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		Aluminum cover in stainless steel optics	1593 4500 0100
<p>EVoline V-Port 2-gang with USB-Charger*</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant sockets, 60°, 16 A, contact-protected. Supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p> <p>1x USB Type A Charger, rated output current: 1 A,</p>		Aluminum cover in stainless steel optics	1593 4500 0300

* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

EVoline® T-Dock




At home in the kitchen.


EVoline® T-Dock

The EVoline T-Dock is raised above the work surface by its solid stainless steel pillar. This gives clutter free space and creates a safe distance between power supply and potentially wet surfaces in the kitchen.


The power supply cable is routed through the stained steel pillar which is also a high quality anti-theft device since it is firmly screwed beneath the surface.

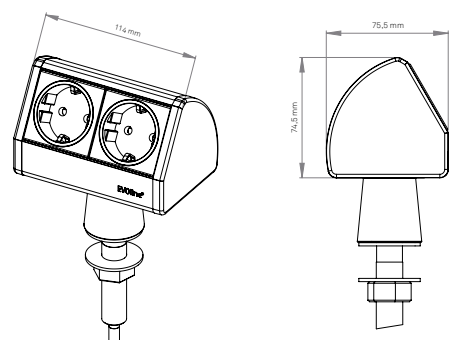


Examples for power supply of the T-Docks:

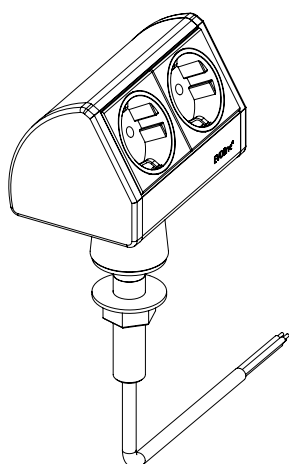


Fixed Power Supply Cable
routed through the stainless
steel pillar.

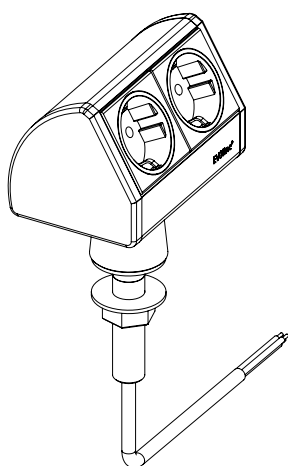

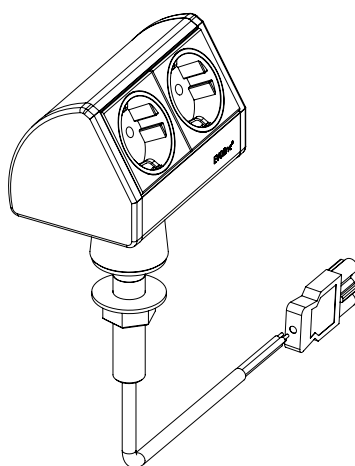

Fixed Power Supply Cable
routed through the stainless
steel pillar.

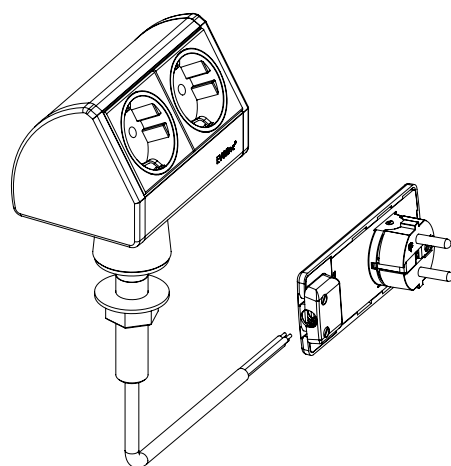

Available with several country
specific plugs, EVoline Plug,
wire end ferrules,
Wieland GST 18i3- or
WAGO WINSTA Connector.



EVOLine® T-Dock

Description	Picture	Specifications	Order Number
<p>EVOLine T-Dock</p> <p>Aluminium housing in stainless steel optics, ALANOX®. For surface thickness up to 50 mm. Two sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable with wire end ferrules, plug supplied unattached.</p> <p>Power supply cable entry through the stainless steel pillar.</p>		<p>Plastic end caps lacquered in black</p> <p>Plastic end caps lacquered in stainless steel optics, ALANOX®</p>	<p>1593 0220 5600</p> <p>1593 0345 5600</p>
<p>EVOLine T-Dock with USB Charger</p> <p>Aluminium housing in stainless steel optics, ALANOX®. For surface thickness up to 50 mm. One socket, VDE-compliant, 0°, 16 A, contact-protected. 1x USB-Charger Type A Output voltage: 5 V DC Rated output current: 1A</p> <p>Fixed supply cable with wire end ferrules, plug supplied unattached. Power supply cable entry through the stainless steel pillar.</p>		<p>Plastic end caps lacquered in black</p> <p>Plastic end caps lacquered in stainless steel optics, ALANOX®</p>	<p>1593 0387 4600</p> <p>1593 0387 5600</p>

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market

EV0line® Vertical




Stable. Free standing.



EVoline® Vertical

EVoline Vertical is a free standing solution for any room. Securely fixed to a solid cast iron base, the Vertical is upright, mobile, space saving and is the ideal solution for offices, hotels or retail areas.

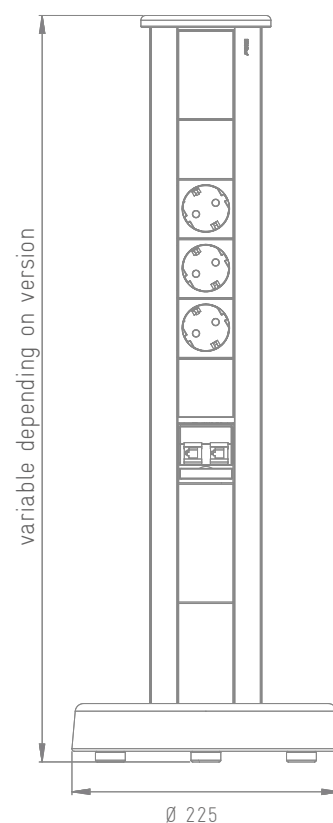The maximum height of 1.20 m makes it unnecessary to bend over to reach sockets: Power, data and multimedia modules are available at a convenient height. It can be positioned right aside a floor outlet.




Dimensions in mm

Description	Picture	Specifications	Order Number
<p>EVOLine Vertical Standard</p> <p>Aluminium housing, free standing, base made of solid cast iron, black powder-coated. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable, 3.0 m with angled plug. Two data sockets RJ 45 CAT 6 shielded each 3.0 m cable and plug. Cover made of aluminium, black powder-coated.</p> <p>Dimensions Base: Diameter ø 22,5 cm Height: 4 cm</p> <p>Profile Height: 600 mm.</p>		<p>Silver anodised</p> <p>Black anodised</p>	<p>1593 4300 1100</p> <p>1593 4300 5000</p>
<p>Empty Housing EVOLine Vertical</p> <p>Aluminium housing, free standing, base made of solid cast iron, black powder-coated. Cover made of aluminium, black powder-coated.</p> <p>Dimensions Base: Diameter ø 24,5 cm Height: 4 cm</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>Profile height 600 mm max. profile height 1200 mm</p> <p>Profile extension > 600 mm (per 50 mm)</p>	<p>9330 8560 0000</p> <p>9330 8570 0000</p> <p>9330 0130 0000</p>

A variety of modules is available for the equipment. Please see the Chapter „Modules“



EVoline[®] Decentralised Electrical Distribution

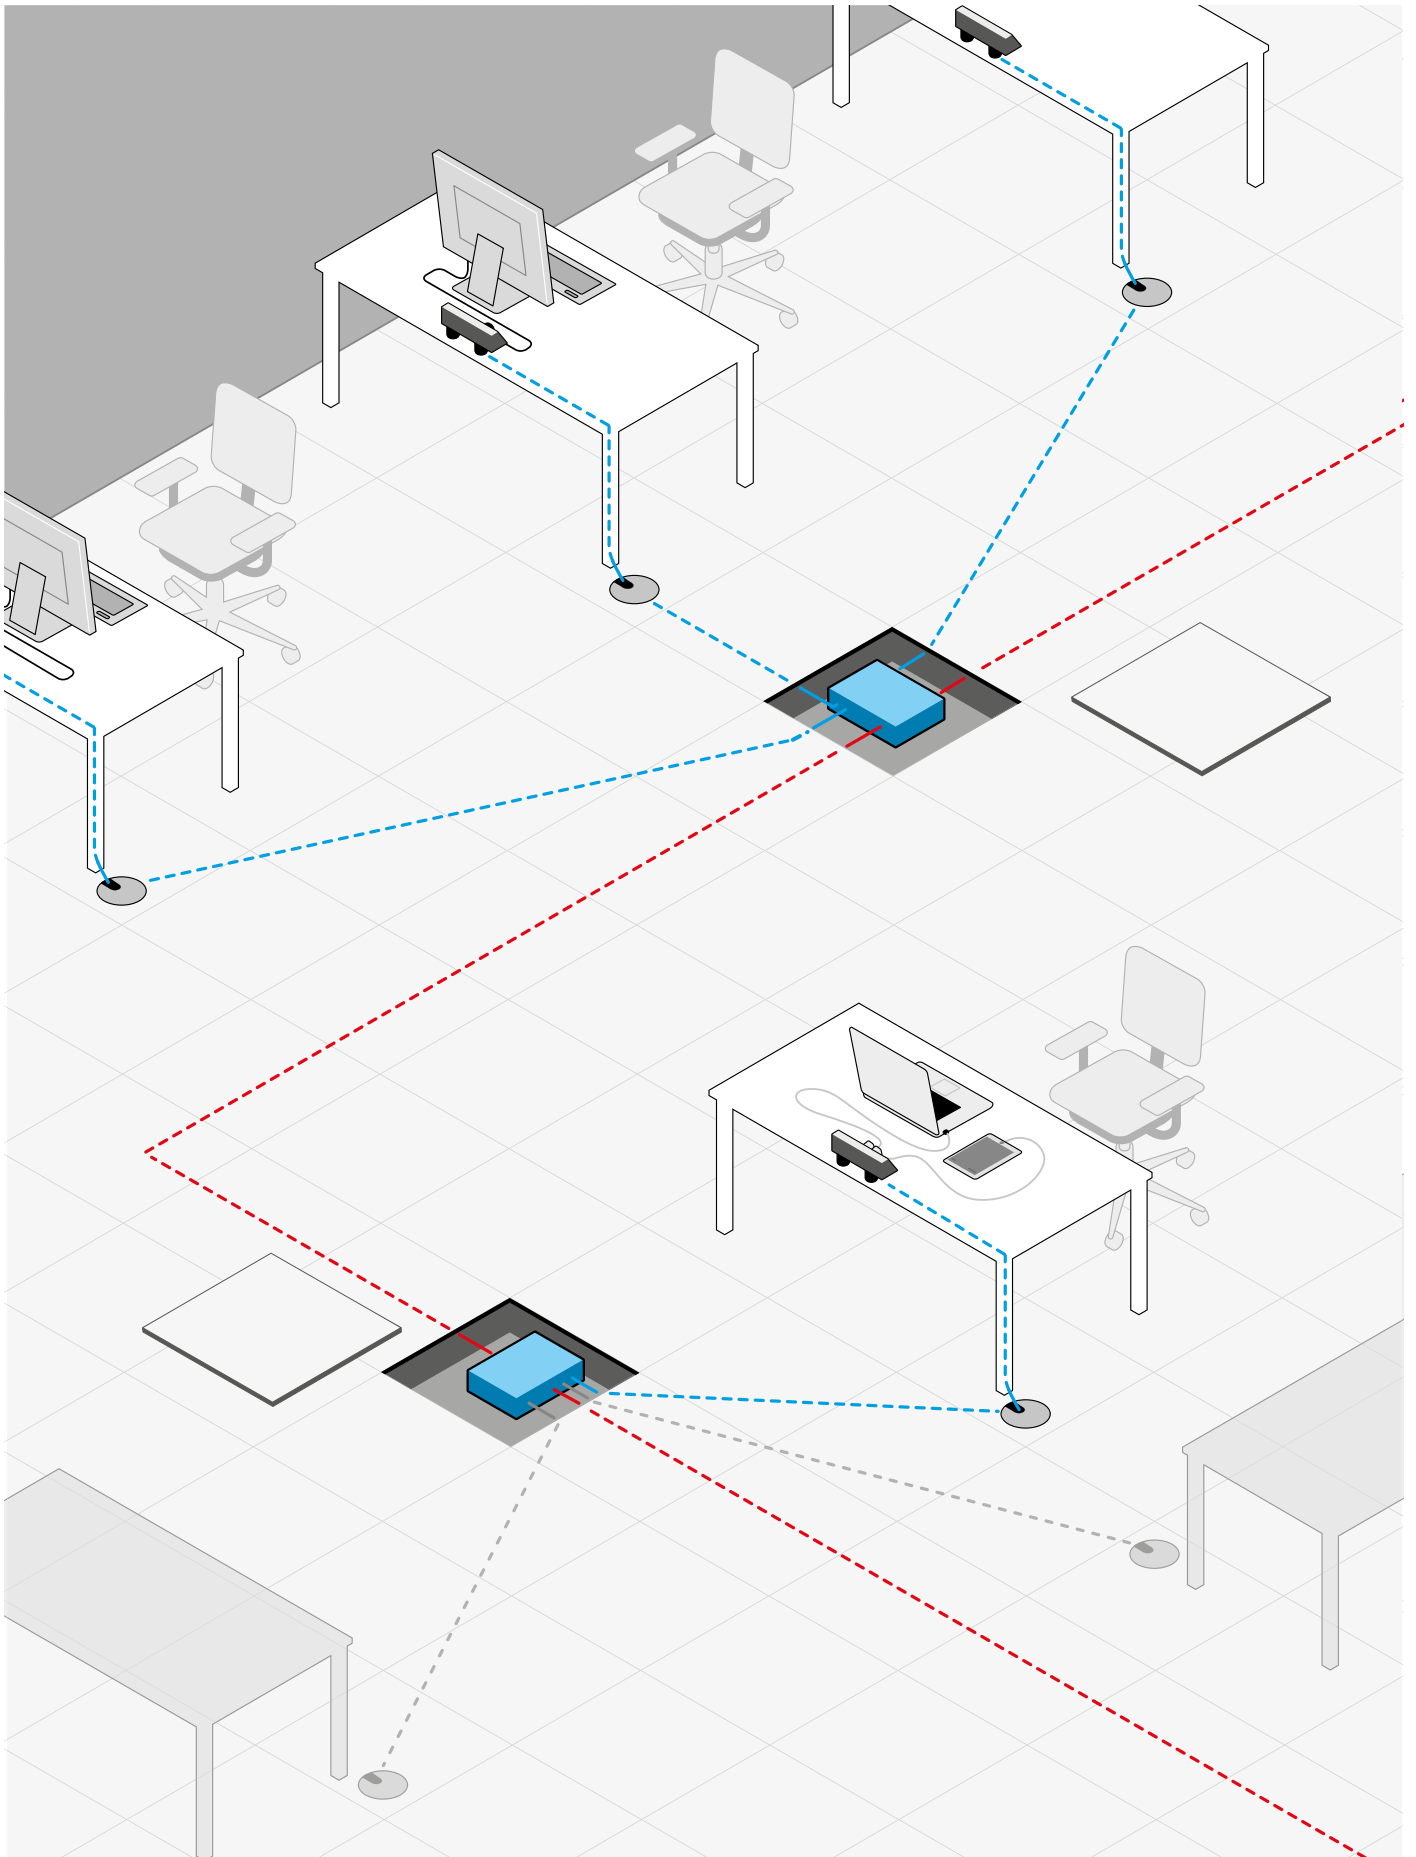


Long-term flexibility, low costs and high operational security.

EVoline® Decentralised Electrical Distribution

The modern work life becomes more and more flexible. Nowadays adaptable spaces along with mobile furniture and equipment within individually created work areas are standard in many offices already. A conventional approach usually reaches its limits because of the services infrastructure.


The essential importance of a flexible power supply is often underestimated during the planning stages. Long-term consequences can often result in cable chaos with potentially fatal safety defects, questionable auxiliary structures or expensive new cable supplies.

The perfect solution: Decentralised Electrical Distribution from Schulte Elektrotechnik.

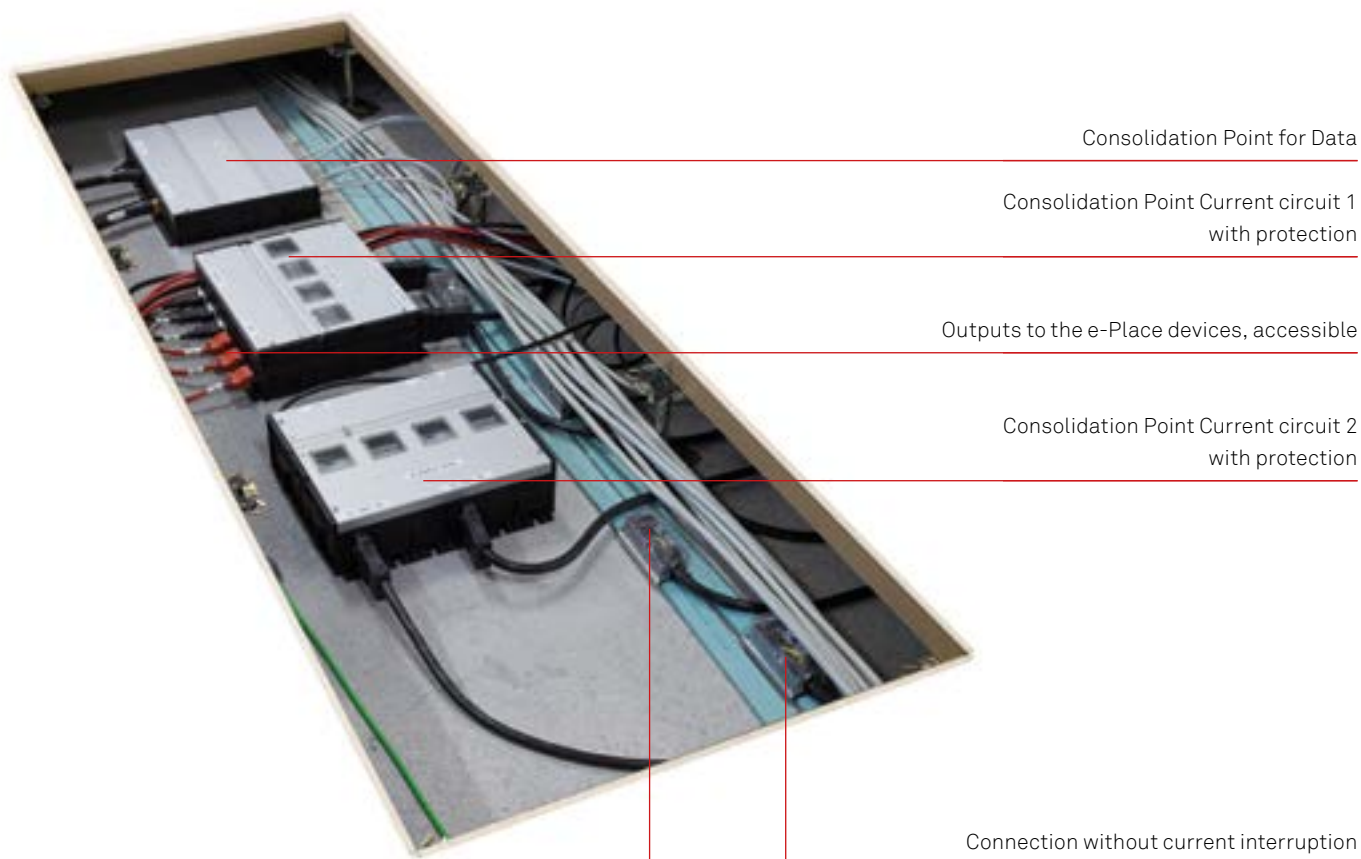

Conventional Electrical Planning

- Increased space requirements for cables
- High fire loads
- High planning costs
- Expensive installation costs
- Labour intensive installation
- Big distribution boxes
- Mandatory 'Electrics Room'

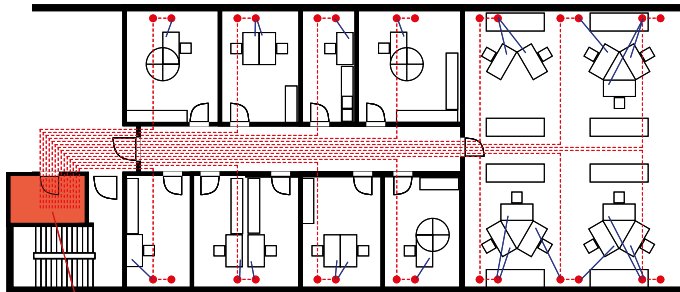


Big
Technical Room

In the office:
Conventional electrical planning


Decentralised Electrical Distribution

- + Smaller 'Electrics Room'
- + Flexibility
- + Easy to change configurations
- + Simplicity
- + Compatible with EnOcean system
- + Safety
- + Aesthetics
- + Future proof
- + Faster installation

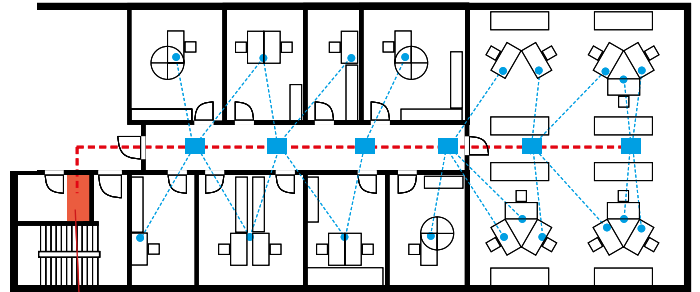


Small
switchboard

In the office:
Decentralised electrical distribution
with EVoline Consolidation Points

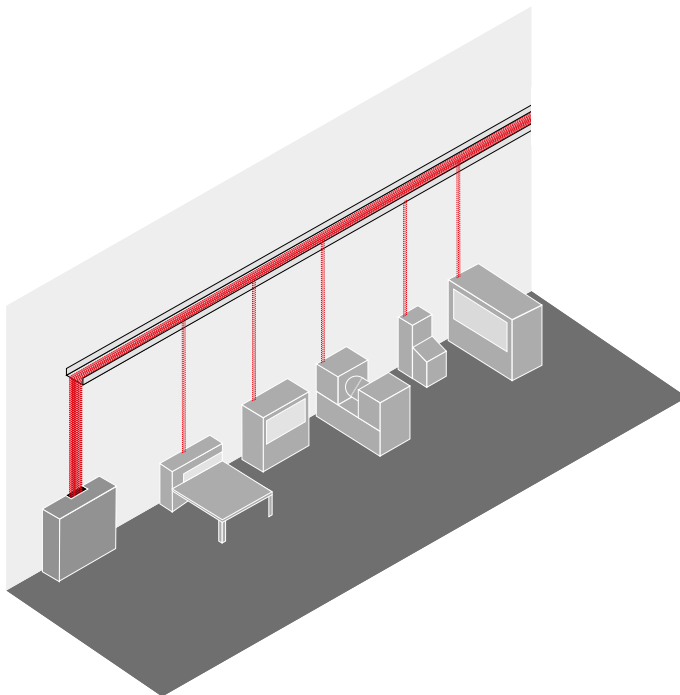



In the production:
Conventional electrical planning

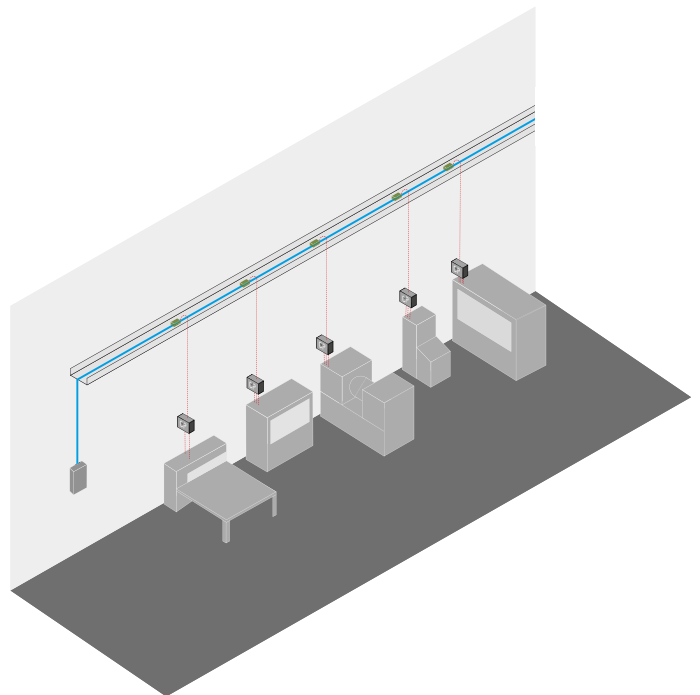

In the production:
Decentralised electrical distribution
with EVoline Consolidation Points

EVoline[®] Consolidation Point

EVoline Consolidation Points are THE modular system for power and data distribution by Schulte Elektrotechnik. They can be customised to your application, subsequently providing flexible adaptability with marginal cost and effort.

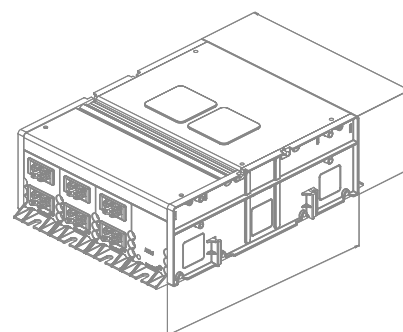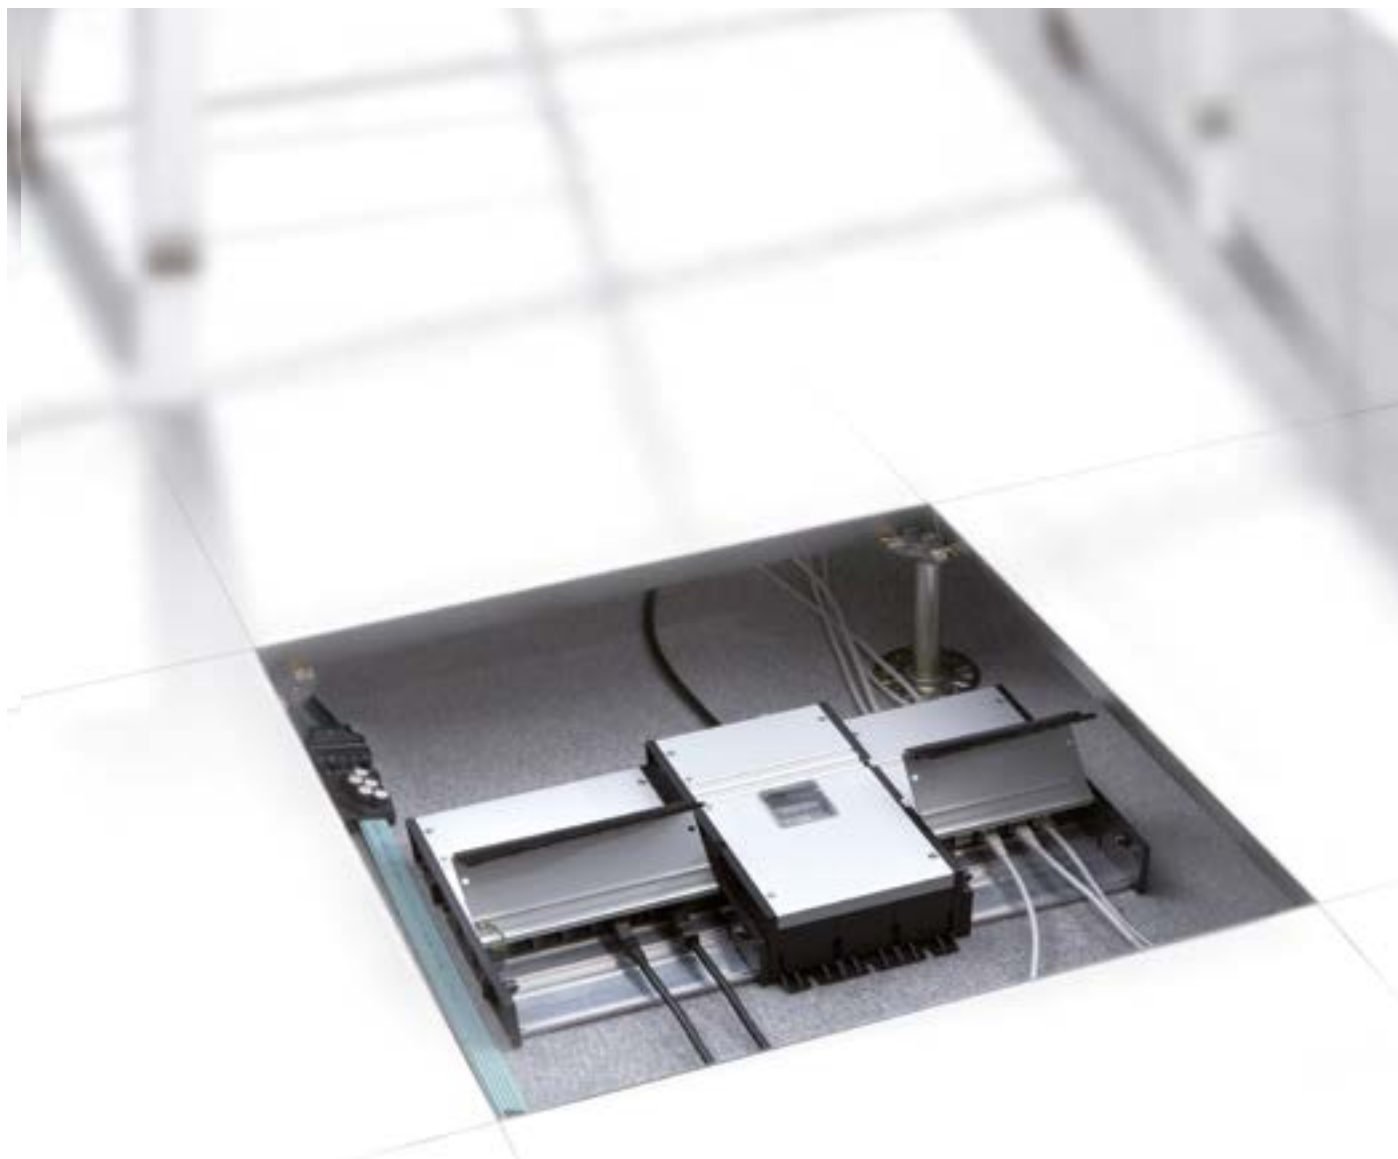

Description	Picture	Specifications	Order Number
<p>EVoline Consolidation Point Power Mini</p> <p>For the power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 250mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA</p> <p>3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 3 × 3-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2300
<p>EVoline Consolidation Point Power Maxi</p> <p>For power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 300mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA</p> <p>3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 6× 3-pole socket and 1× 5-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2400
<p>EVoline Consolidation Point Data</p> <p>For data supply of workspaces; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 260mm × 266 mm × 60mm</p>		<p>Input side: Knock-outs for data cables up to Ø 9mm</p> <p>Output side: 8× CAT6A modular coupling</p>	1594 1000 0100

EV0line[®] Modules



Endless possibilities.

EVoline® Modules

EVoline systems can be configured to individual needs with a wide range of modules available - there is no general solution for the supply of e-connectivity.

Often just power sockets are the sufficient configuration: in a different environment international sockets plus USB Chargers may be the right choice. With telephones, EDP and multimedia connectors options become even more diverse.


Whether a data or a HDMI connector, the individual application defines the requirements.



EVoline® Country specific socket variants

The chart below gives an overview about country specific socket versions. Deviations may occur.


Socket VDE (CEE 7/3)
230 V, 16 A



Plug Type
F, E+F, C

Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine


Socket (CEE 7/5)
230 V, 16 A



Plug Type
E, E+F, C

France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia


Socket (BS 1363)
230 V, 3,15 A oder 5 A



Plug Type
G

Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe


Socket (SEV 1011)
230 V, 10 A, T13



Plug Type
J, C

Switzerland, Liechtenstein

Socket (SEV 1011)
230 V, 16 A, T23



Plug Type
J, C

Switzerland, Liechtenstein

Socket (DS 608842-D1)
230 V, 13 A



Plug Type
K, C

Denmark, Greenland

Socket (DS 608842-D1)
230 V, 13 A, EDV



Plug Type
K EDV

Denmark, Greenland

Socket (CEI 23-16-VII)
230 V, 16 A oder 10 A



Plug Type
L, C

Italy, Chile, Cuba

Socket (AS 3112)
230 V, 10 A



Plug Type
I

Australia, New Zealand, Papua New Guinea, several Pacific Islands

Socket (NEMA 5-15)
120 V, 15 A









Plug Type
B

USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Carribian Islands





Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /							
Socket 0°, 16 A Contact-protected VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 0090 0000 black	•	•	•			•	•	•
		9330 0200 0000 red	•	•	•			•	•	•
		9330 3780 0000 green	•	•	•			•	•	•
		9330 5450 0000 white	•	•	•			•	•	•
		9330 5480 0000 light grey	•	•	•			•	•	•
Socket 0°, 16 A without Contact-protection VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mmv		9330 6190 0000 black	•	•	•			•	•	•
		9330 6220 0000 red	•	•	•			•	•	•
Socket 0°, 16 A Contact-protected VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)	•							






Dock / R-Dock
Dock Square
FrameDock
Port
Port Push
Vertical
V-Dock
U-Dock

Description	Picture	Order Nr. & Specifications						
Socket 60°, 16 A, Contact-protected VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 1050 0000 black	●	●	●	●	●	●
		9330 1430 0000 red	●	●	●	●	●	●
		9330 3790 0000 green	●	●	●	●	●	●
		9330 5460 0000 white	●	●	●	●	●	●
		9330 5490 0000 light grey	●	●	●	●	●	●
Socket 60°, 16 A without Contact-protection VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 6200 0000 black	●	●	●	●	●	●
		9330 6230 0000 red	●	●	●	●	●	●
Socket 60°, 16 A Contact-protected VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm,		9330 8140 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)	●					
Socket 90°, 16 A Contact-protected VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 1260 0000 black	●	●	●		●	●
		9330 1050 0000 red	●	●	●		●	●
		9330 3800 0000 green	●	●	●		●	●
Socket 90°, 16 A without Contact-protection VDE for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 6210 0000 black	●	●	●		●	●
		9330 6240 0000 red	●	●	●		●	●





Description	Picture	Order Nr. & Specifications	<div>/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /</div>
<div>Socket 0°, 16 A Contact-protected, France, Belgium, Poland * for plug type: E, C, E+F Installation dimensions: 50 x 50 mm, black</div>		<div>9330 0250 0000 black</div>	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
<div>Socket 60°, 16 A Contact-protected, France, Belgium, Poland * for plug type: E, C, E+F Installation dimensions: 50 x 50 mm,</div>		<div>9330 1060 0000 black</div>	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>


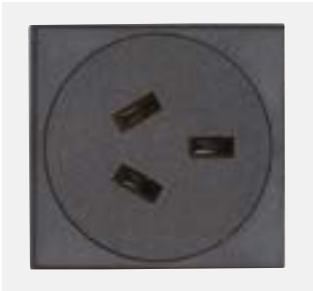

/ Dock / R-Dock
/ Dock Square
/ FrameDock
/ Port
/ Port Push
/ Vertical
/ V-Dock
/ U-Dock
/

Description	Picture	Order Nr. & Specifications	$\frac{1}{D}$	$\frac{2}{D}$	$\frac{3}{L^E}$	$\frac{1}{D^0}$	$\frac{2}{D^0}$	$\frac{3}{V^E}$	$\frac{1}{L}$	$\frac{2}{L}$
Socket 0°, 10 A without Contact-protection, Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm		9330 1100 0000 black	•	•	•			•	•	•
		9330 1480 0000 red	•	•	•			•	•	•
Socket 0°, 16 A without Contact-protection, Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm		9330 1010 0000 black	•	•	•			•	•	•
		9330 1710 0000 red	•	•	•			•	•	•
Socket 60°, 10 A without Contact-protection, Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm		9330 1110 0000 black	•	•	•	•	•	•	•	•
		9330 1490 0000 red	•	•	•	•	•	•	•	•
Socket 60°, 16 A without Contact-protection, Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm		9330 1070 0000 black	•	•	•	•	•	•	•	•
		9330 1450 0000 red	•	•	•	•	•	•	•	•




Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /							
<p>Socket 0°, 13 A Contact-protected,</p> <p>Denmark, Standard * for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1020 0000 black</p>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>	<div></div>
<p>Socket 0°, 13 A Contact-protected,</p> <p>Denmark, EDV-coded * for plug type: K</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1030 0000 black</p> <p>9330 1730 0000 red</p>								
<p>Socket 60°, 13 A Contact-protected</p> <p>Denmark, Standard * for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1080 0000 black</p>								
<p>Socket 240°, 13 A Contact-protected</p> <p>Denmark, Standard * for plug type: K, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7190 0000 black</p>								
<p>Socket 0°, 10 A / 16 A Contact-protected,</p> <p>Italy *</p> <p>for plug type: L, C</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 3180 0000 black</p>								

/ Dock / R-Dock
/ Dock Square
/ FrameDock
/ Port
/ Port Push
/ Vertical
/ V-Dock
/ U-Dock
/


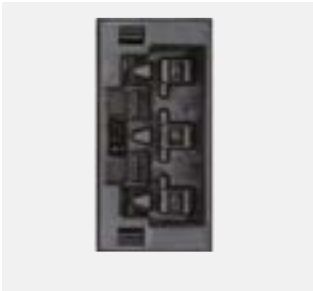

Description	Picture	Order Nr. & Specifications						
Socket 90°, 13 A Contact-protected Great Britain * without fuse, for plug type: G Installation dimensions: 75 x 50 mm		9330 4430 0000 black	●	●	●	●	●	●
		9330 4440 0000 red	●	●	●	●	●	●
Socket 90° Contact-protected Great Britain * with integrated fuse for plug type: G Installation dimensions: 75 x 50 mm		9330 4450 0000 black; 3,15 A	●	●	●	●	●	●
		9330 4460 0000 red, 3,15 A	●	●	●	●	●	●
		9330 4470 0000 black; 5 A	●	●	●	●	●	●
		9330 4480 0000 red; 5 A	●	●	●	●	●	●
Socket 30°, 13 A Contact-protected Great Britain * without fuse, for plug type: G Installation dimensions: 60 x 50 mm		9330 3670 0000 black	●	●	●	●	●	●
		9330 3680 0000 red	●	●	●	●	●	●
Socket 30° Contact-protected Great Britain * with integrated fuse for plug type: G Installation dimensions: 60 x 50 mm		9330 3690 0000 black; 3,15 A	●	●	●	●	●	●
		9330 3700 0000 red; 3,15 A	●	●	●	●	●	●
		9330 3710 0000 black; 5 A	●	●	●	●	●	●
		9330 3720 0000 red; 5 A	●	●	●	●	●	●

Description	Picture	Order Nr. & Specifications	<div><div>/ Dock / R-Dock</div><div>/ Dock Square</div><div>/ FrameDock</div><div>/ Port</div><div>/ Port Push</div><div>/ Vertical</div><div>/ V-Dock</div><div>/ U-Dock</div></div>
<div><div>Socket 0°, 10 A</div><div>without Contact-protection</div><div>Australia, *</div><div>for plug type: I</div><div>Installation dimensions:</div><div>50 x 50 mm</div></div>		<div><div>9330 5240 0000</div><div>black</div><div>9330 5270 0000</div><div>red</div></div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<div><div>Socket 270°, 10 A</div><div>without Contact-protection</div><div>Australia, *</div><div>for plug type: I</div><div>Installation dimensions:</div><div>50 x 50 mm</div></div>		<div><div>9330 5890 0000</div><div>black</div></div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>
<div><div>Socket 0°, 10 A Angled Outlet</div><div>without Contact-protection</div><div>Australia, *</div><div>for plug type: I,</div><div>Not suitable for angled plugs.</div><div>Installation dimensions:</div><div>75 x 50 mm</div></div>		<div><div>9330 4010 0000</div><div>black</div><div>9330 4400 0000</div><div>red</div></div>	<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>






Dock / R-Dock
Dock Square
FrameDock
Port
Port Push
Vertical
V-Dock
U-Dock
/

Description	Picture	Order Nr. & Specifications					
Socket 0°, 15 A without Contact-protection USA, Canada, * for plug type: B (NEMA, 5-15) Installation dimensions: 50 x 50 mm		9330 5360 0000 black 9330 5390 0000 red	•	•	•	•	•
Socket 60°, 15 A without Contact-protection USA, Canada, * for plug type: B (NEMA, 5-15) Installation dimensions: 50 x 50 mm		9330 5370 0000 black 9330 5400 0000 red	•	•	•	•	•
Socket 0°, 15 A Angled Outlet without Contact-protection, USA, Canada, * for plug type: B (NEMA, 5-15) Not suitable for angled plugs. Installation dimensions: 75 x 50 mm		9330 4030 0000 black 9330 4420 0000 red			•	•	




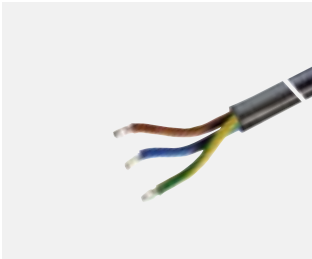

EVOLine® Sockets




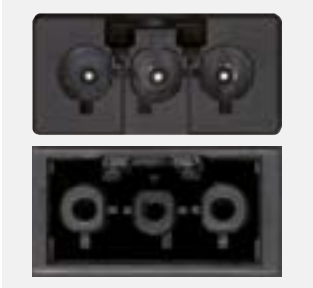

Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FrameDock</div>	<div>Port</div>	<div>Port Push</div>	<div>Vertical</div>	<div>V-Dock</div>	<div>U-Dock</div>
<div>Connector 16 A</div> <div>Wieland GST 18i3</div> <div>Socket GST 18i3 Snap-In. for current output Installation dimensions: 25 x 50 mm</div>		9330 8990 0000 black	●	●	●			●	●	●
<div>Connector 16 AWAGO WINSTA MIDI</div> <div>Socket WAGO WINSTA Snap-In. for current output Installation dimensions: 25 x 50 mm</div>		9330 8970 0000 black	●	●	●			●	●	●
<div>USB Charger*</div> <div>USB Type A Charger, charging function only.</div> <div>Rated supply voltage: 100-240 V_{AC} +/- 10%. No-load power consumption at 230 V_{AC} <= 0,1 Watt. Output voltage: 5V_{DC} +/- 5%. Rated output current: 1 A</div> <div>Installation dimensions: 25 x 50 mm</div>		9331 5580 0000	●	●	●	●	●	●	●	●




*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FrameDock</div> <div>Port</div> <div>Port Push</div> <div>Vertical</div> <div>V-Dock</div> <div>U-Dock</div> </div>
<p>Power Supply Module with cable and EVOLine PlugFix</p> <p>Type E+F i.e. Germany 16 A, 3 x 1.5 mm² Plug with extra low profile and movable plug face. Plug cannot be removed from the cable.</p>		<p>9331 0890 0000 Cable length 3 m, black</p>	<div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div>
<p>Power Supply Module with cable and angled plug</p> <p>Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm²</p>		<p>9330 2020 0000 Cable length 3 m, black</p>	<div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div>
<p>Power Supply Module with cable and plug Type J</p> <p>Type J i.e. Switzerland 3 x 1,5 mm²</p>		<p>9330 2030 0000 10 A, Cable length 3 m, black</p> <p>9330 2040 0000 16 A, Cable length 3 m, black</p>	<div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div> <div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div>
<p>Power Supply Module with Cable and Overload Circuit Breaker</p> <p>Plug type J i.e. Switzerland Power Supply Module with resettable overload switch 10 A 3x 1,5 mm²</p>		<p>9332 1090 0000 Cable length 3 m, black mounted to product</p>	<div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div>
<p>Power Supply Module with cable and angled plug</p> <p>Type G, i.e. Great Britain 13 A, 3 x 1,5 mm²</p>		<p>9330 2070 0000 Cable length 3 m, black</p>	<div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> <div>●</div> </div>



EVOLine® Power Supply Modules



Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock</div>	<div>Dock Square</div>	<div>FrameDock</div>	<div>Port</div>	<div>Port Push</div>	<div>Vertical</div>	<div>V-Dock</div>	<div>U-Dock</div>
Power Supply Module with cable and angled plug Type K 13 A, 3 x 1.5 mm ² Denmark. Standard		9330 2050 0000 Cable length 3 m, black 9330 2060 0000 Plug, not angled, EDP-coded, Cable length 3 m black	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>
Power Supply Module with cable and Plug Plug Type L i.e. Italy 16 A, 3 x 1.5 mm ²		9330 2080 0000 Cable length 3 m, black	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>
Power Supply Module with cable and Plug Type B 115 V. 15 A, AWG 14 i.e. USA, Canada (UL/CSA)		9330 9160 0000 Cable length 3 m, black	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>
Power Supply Module with cable and ferrules 16 A, 3 x 1,5 mm ²		9330 9510 0000 Cable length 3 m, black	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>
Power Supply Module with cable and GST18 plug 16 A, 3 x 1,5 mm ²		9330 8420 0000 Cable length 3 m, black, without lock*, 9331 2490 0000 Cable length 3 m, black with lock	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>	<div>●</div>

Description	Picture	Order Nr. & Specifications	<div> <div>/ Dock / R-Dock</div> <div>/ Dock Square</div> <div>/ FrameDock</div> <div>/ Port</div> <div>/ Port Push</div> <div>/ Vertical</div> <div>/ V-Dock</div> <div>/ U-Dock</div> </div>							
Power Output Module with cable and GST18i3 socket 16 A, 3 x 1,5 mm ²		9330 5810 0000 Cable length 3 m, black, without lock*,	•	•	•	•	•	•	•	•
		9331 2500 0000 Cable length 3 m, black, with lock	•	•	•	•	•	•	•	•
Power Supply Module with cable and WAGO WINSTA MIDI plug 16 A, 3 x 1,5 mm ²		9330 8440 0000 Cable length 3 m, black, without lock*,	•	•	•	•	•	•	•	•
Power Output Module with cable and WAGO WINSTA MIDI socket. 16 A, 3 x 1,5 mm ²		9330 5830 0000 Cable length 3 m, black, without lock*,	•	•	•	•	•	•	•	•
Connector 3-pole Wieland GST 18i3 Installed in the end cap Plug GST 18 Socket GST 18 Colour: black		9330 2680 0000 Power input plug	•	•	•				•	
		9330 8960 0000 Power output socket	•	•	•				•	
Connector 3 pole WAGO WINSTA MIDI Snap-In. Installed in the end cap Plug WAGO WINSTA MIDI Socket WAGO WINSTA MIDI Colour: black		9330 2660 0000 Power input plug	•	•	•				•	
		9330 8940 0000 Power output socket	•	•	•				•	





Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /			
<p>Data Plate with 2x Data Socket Nexans</p> <p>Removable dust caps With Labeling Field With Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p> <p>black Dust caps. Other colours on request.</p>		<p>9331 6350 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6360 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6370 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>				
<p>Data Plate with Data Socket Nexans</p> <p>Angled Outlet with Labeling Field</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 6380 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6390 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6400 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>				
<p>Data Plate with 2x Snap-In Data Socket Nexans</p> <p>Angled Outlet with Labeling Field</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 6410 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6420 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6430 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>				

Dock / R-Dock
Dock Square
FrameDock
Port
Port Push
Vertical
V-Dock
U-Dock
/


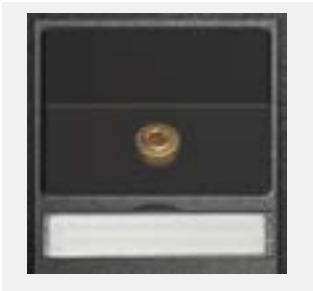
Description	Picture	Order Nr. & Specifications				
Data Plate with Data Socket Nexans with Cable and Plug / Socket Installation Dimensions: 25 x 50 mm		9331 6970 0000 RJ45 CAT6 shielded 0,3 m Cable, Socket	•	•		•
		9331 3040 0000 RJ45 CAT6 shielded 3 m Cable, Plug	•	•		•
		9331 2890 0000 RJ45 CAT6A shielded 3 m Cable, Plug	•	•		•
		9331 6340 0000 GG45 CAT7 shielded 3 m Cable, Plug	•	•		•
Data Plate with Data Socket Reichle & De-Massari with Cable and Plug / Socket Installation Dimensions: 25 x 50 mm		9331 2150 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket	•	•		•
		9330 8270 0000 RJ45 CAT6 unshielded 3 m Cable, Plug	•	•		•
		9330 7860 0000 RJ45 CAT6 shielded 3 m Cable, Plug	•	•		•
		9331 0020 0000 RJ45 CAT6 _A shielded 3 m Cable, Plug	•	•		•

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /			
Data Plate Data Socket Reichle & De-Massari Angled Outlet with labeling field with Cable and Plug Installation Dimensions: 50 x 50 mm		9331 2150 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket (RJ45)		•	•	•
		9331 0010 0000 RJ45 CAT6 unshielded 3m Cable, Plug		•	•	•
		9330 6140 0000 RJ45 CAT6 shielded 3 m Cable Plug		•	•	•
		9331 0030 0000 RJ45 CAT6 _A shielded 3 m Cable Plug		•	•	•
Data Plate with 2x Data Sockets Reichle & De-Massari Angled Outlet with labeling field, with Cable and Plug / Socket Installation Dimensions: 50 x 50 mm		9331 2590 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket (RJ45)		•	•	•
		9330 4340 0000 RJ45 CAT6 unshielded 3m Cable, Plug		•	•	•
		9330 1230 0000 RJ45 CAT6 shielded 3 m Cable, Plug		•	•	•
		9331 0040 0000 RJ45 CAT6 _A shielded 3 m Cable, Plug		•	•	•





Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FrameDock</div> <div>Port</div> <div>Port Push</div> <div>Vertical</div> <div>V-Dock</div> <div>U-Dock</div> </div>
<p>Data Plate with Data Socket ELBRO</p> <p>Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable.</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9330 6550 0000 RJ45 CAT6 unshielded</p> <p>9330 8410 0000 (RJ45) CAT6 shielded</p> <p>9331 4080 0000 (RJ45) CAT6_A shielded</p>	<div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>Data Plate with Data Socket ELBRO</p> <p>Angled Outlet with labeling field. Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm</p>		<p>9330 6560 0000 (RJ45) CAT6 unshielded</p> <p>9330 5880 0000 (RJ45) CAT6 shielded</p> <p>9331 4090 0000 (RJ45) CAT6_A shielded</p>	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>Data Plate with 2x Data Sockets ELBRO</p> <p>Angled Outlet with Labeling Field Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm</p>		<p>9330 6570 0000 (RJ45) CAT6 unshielded</p> <p>9330 3920 0000 (RJ45) CAT6 shielded</p> <p>9331 4100 0000 (RJ45) CAT6_A shielded</p>	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>Data Plate with 2x Data Sockets ELBRO</p> <p>Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Angled: 90°</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 4870 0000 (RJ45) CAT6, shielded</p>	<div> <div>•</div> <div>•</div> </div>

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / L-Dock / U-Dock /					
VGA-Socket 15 pole HDD socket with screw terminals, Installation dimensions: 25 x 50 mm		9330 0810 0000 with 3 m cable and plug	•	•		•	•	•
VGA-Socket Angled outlet with labeling field 15 pole HDD socket with screw terminals, Installation dimensions: 50 x 50 mm		9330 2370 0000 with 3 m cable and plug			•	•	•	•
VGA- and Audio Socket 1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 7920 0000 with 3 m cables and plugs	•	•		•	•	•
VGA- and Audio Connector Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm Installation dimensions: 50 x 50 mm		9331 5370 0000 with 3 m cables and plugs			•	•	•	•


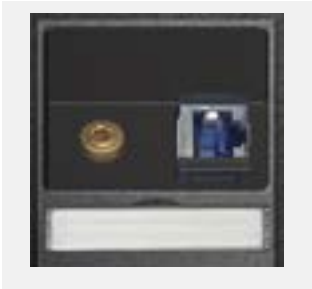


Dock / R-Dock
Dock Square
FrameDock
Port
Port Push
Vertical
V-Dock
U-Dock
/





Description	Picture	Order Nr. & Specifications				
Audio Port 3.5mm 1 x Stereo Jack socket 3.5 mm Installation dimensions: 25 x 50 mm		9330 0910 0000 with 3 m cable and plug	•	•	• • •	
Audio Port 3.5mm Angled outlet with labeling field. 1 x Stereo Jack socket 3.5 mm Installation dimensions: 50 x 50 mm		9330 2460 0000 with 3 m cable and plug	•	•	• • •	




Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /							
DVI-I Socket Dual Link. 24+5 pole. for digital and analogue signals Installation dimensions: 25 x 50 mm		9331 7730 0000 with 0.2 m Cable and Socket 9331 7700 0000 with 3 m Cable and Plug with 5 m Cable and Plug	•	•			•	•		
DVI-I Socket Dual Link. 24+5 pole. for digital and analogue signals Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 7740 0000 with 0.2 m Cable and Socket 9331 7710 0000 with 3 m Cable and Plug with 5 m Cable and Plug			•		•	•	•	•
HDMI-Socket HDMI 1.4 connector with gilded contacts. Installation dimensions: 25 x 50 mm.		9330 6060 0000 with 0.3 m Cable and Socket 9330 6070 0000 with 3 m Cable and Plug with 5 m Cable and Plug	•	•			•	•		
HDMI-Socket Angled outlet with labeling field HDMI 1.4 connector with gilded contacts. Installation dimensions: 50 x 50 mm		9330 6080 0000 with 0.3 m Cable and Socket 9330 6090 0000 with 3 m Cable and Plug with 5 m Cable and Plug			•		•	•	•	•



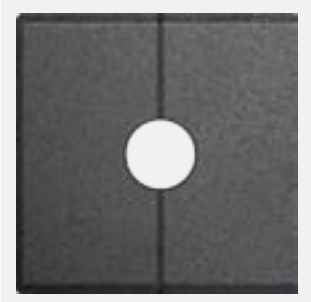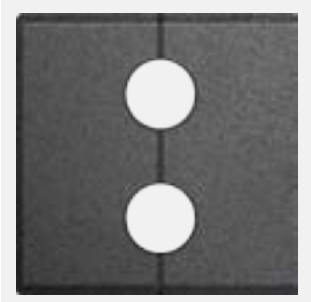

Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FrameDock</div> <div>Port</div> <div>Port Push</div> <div>Vertical</div> <div>V-Dock</div> <div>U-Dock</div> </div>
DisplayPort-Socket for digital signals DP 1.2 compliant. Installation dimensions: 25 x 50 mm		9331 7510 0000 with 0.4 m Cable and Socket	<div> <div>•</div> <div>•</div> <div></div> <div>•</div> <div>•</div> </div>
DisplayPort-Socket Angled outlet with labeling field for digital signals DP 1.2 compliant. Installation dimensions: 50 x 50 mm		9331 7520 0000 with 0.4 m Cable and Socket	<div> <div></div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
USB 2.0 - Connector 1 x USB 2.0 Type A socket for connection of USB standard consumer devices. Installation dimensions: 25 x 50 mm		9330 1040 0000 with 3 m USB Cable Plug USB 2.0 Type A	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
USB 2.0 - Connector Angled outlet with labeling field USB 2.0 Type A socket for connection of USB standard consumer devices. Installation dimensions: 50 x 50 mm		9330 2430 0000 with 3 m USB Cable Plug USB 2.0 Type A	<div> <div></div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /					
USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		9331 8620 0000 0.2 m Cable and Socket 9331 1450 0000 1 m USB Cable Plug USB 3 Type A 3 m USB Cable Plug USB 3 Type A	•	•			•	
USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 8630 0000 0.2 m Cable and Socket 9331 1460 0000 1 m USB Cable, Plug USB 3 Type A 3 m USB Cable Plug USB 3 Type A			•		•	•
USB 3.1 - Connector USB 3.1 type C suitable for data and power supply. Max. Current: 3A. Installation dimensions: 15 x 50 mm		9331 9710 0000 0.2 m USB Cable Socket USB 3.1 Type C	•	•				•
USB 3.1 - Connector Angled outlet with labeling field. USB 3.1 type C suitable for data and power supply. Max. Current: 3A. Installation dimensions: 50 x 50 mm		9331 9870 0000 0.2 m USB Cable Socket USB 3.1 Type C			•		•	•





Description	Picture	Order Nr. & Specifications	Dock / R-Dock	Dock Square	FrameDock	Port	Port Push	Vertical	V-Dock	U-Dock
Audio Connector and stainless steel push-button with ring LED 1x Stereo Jack Socket 3.5 mm 1x Push-Button Operating voltage: 24 V _{AC/DC} Operating current: 10 mA with angled outlet and labeling field Installation dimensions: 50 x 50 mm		9331 9490 0000 Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm Push-Button with 3 m Cable without plug					●	●	●	●
Audio Connector and Data Socket Reichle & De-Massari Cat. 6 1x Stereo Jack socket 3.5 mm for audio signals 1x Data Socket with cable Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9330 7610 0000 Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm Data RJ45 Cat. 6 Socket with 3 m Cable, shielded and RJ45 Plug					●	●	●	●
Audio Connector and Data Socket Elbro 1x Modular-Adaptor RJ45 Cat. 6 shielded 1x Stereo Jack socket 3.5 mm for audio signals Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9330 7800 0000 Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm Data Modular-Adaptor RJ45 (without Cable)					●	●	●	●
HDMI- and Audio Socket 3.5mm 1x HDMI 1.4 connector with gilded contacts. 1x Stereo Jack socket 3.5 mm for audio signals. Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 5100 0000 Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm HDMI with 3 m Cable and Plug					●	●	●	●





Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /							
Cable Outlet Module 1 cable passage Cable can be pulled through Colour: black Installation dimensions: 50 x 50 mm		9331 3790 0000 Ø 8mm	•	•	•			•	•	
		9331 0560 0000 Ø 12mm	•	•	•			•	•	
		9331 1670 0000 Ø 17mm	•	•	•			•	•	
		Additional diameters on demand								
Cable Outlet Module 2 cable passages Cables can be pulled through Colour: black Installation dimensions: 50 x 50 mm		9331 3800 0000 Ø 8mm	•	•	•			•	•	
		9331 1930 0000 Ø 12mm	•	•	•			•	•	
		Additional diameters on demand								
Cable Guide-Module Holder for 3 cables Ø 2 x 8 mm, 1 x 12 mm Cables can be pulled through Colour: black Installation dimensions: 25 x 50 mm		9331 3600 0000 Holder for 3 Cables			•					
Cable assortment 3.0 m cable and 2 plugs, cable extensions and variations available on request.		9331 0350 0000 HDMI Cable	•	•	•	•	•	•	•	•
		9331 3060 0000 VGA Cable	•	•	•	•	•	•	•	•
		9331 3760 0000 Displayport Cable	•	•	•	•	•	•	•	•
		9331 3720 0000 Audio Stereo Cable	•	•	•	•	•	•	•	•
		9331 1060 0000 PatchCable Cat. 6, shielded	•	•	•	•	•	•	•	•
		9331 9810 0000 USB 3.0 cable Plug - Plug (Type A)	•	•	•	•	•	•	•	•

Description	Picture	Order Nr. & Specifications	<div>Dock / R-Dock Dock Square FrameDock Port Port Push Vertical V-Dock U-Dock</div>
<div>ON / OFF switch</div> <div>illuminated in blue for various functions, i.e. switching of: - built-in sockets, - design lighting, - external sources via separate power cable</div> <div>Installation dimensions: 50 × 50 mm</div>		9330 0010 0000	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
<div>ON / OFF switch</div> <div>illuminated in blue with lamp symbol for switching of external lighting installation</div> <div>Installation dimensions: 50 × 50 mm</div>		9330 6650 0000	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
<div>ON / OFF switch</div> <div>illuminated in blue with lamp symbol for switching of external lighting installation</div> <div>Installation dimensions: 50 × 50 mm</div>		9330 6660 0000	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>

Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FrameDock</div> <div>Port</div> <div>Port Push</div> <div>Vertical</div> <div>V-Dock</div> <div>U-Dock</div> </div>
<p>1 × Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 25x50 mm</p>		<p>9331 9300 0000 with Screw terminals</p> <p>9331 9240 0000 with 3 m cable and ferrules</p>	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>2 × Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 25x50 mm</p>		<p>9331 9310 0000 with Screw terminals</p> <p>9331 9250 0000 with 3 m cable and ferrules</p>	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>1 × Stainless steel push-button with blue ring-LED</p> <p>Angled outlet with labeling field. Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optionally. Installation dimensions: 50x50 mm</p>		<p>9331 9320 0000 with Screw terminals</p> <p>9331 9260 0000 with 3 m cable and ferrules</p>	<div> <div>•</div> <div>•</div> <div>•</div> </div>
<p>2 × Stainless steel push-button with blue ring-LED</p> <p>Angled outlet with labeling field. Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optionally. Installation dimensions: 50x50 mm</p>		<p>9331 9330 0000 with Screw terminals</p> <p>9331 9270 0000 with 3 m cable and ferrules</p>	<div> <div>•</div> <div>•</div> <div>•</div> </div>




Description	Picture	Order Nr. & Specifications	<div><div>/ Dock / R-Dock</div><div>/ Dock Square</div><div>/ FrameDock</div><div>/ Port</div><div>/ Port Push</div><div>/ Vertical</div><div>/ V-Dock</div><div>/ U-Dock</div><div>/</div></div>
<div><div><div>4x Pushbutton</div><div><div>closing contact 1-pole, switching capacity max. 24 V_{AC/DC}, 100 mA, potential free 4 × pushbutton, LED illuminated, LED supply voltage adjustable from 0 to 48 V, connection via screw connector</div></div></div><div><div>Installation dimensions: 50 × 50 mm</div></div></div> <div></div> <div><div>9331 9500 0000</div><div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div></div>	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>		
<div><div><div>Master / Slave Switch 2-pole</div><div><div>controls downstream sockets (slave sockets), available only as com- bination of upstream master and downstream slave sockets</div></div></div><div><div>Switching threshold: adjustable from 20 to 100 mA, Rated voltage: 250 V, Rated current: 16 A, 2-pole, Protection class IP20, black plastic frame</div></div><div><div>Installation dimensions: 75 x 50 mm</div></div></div> <div></div> <div><div>9330 6160 0000</div><div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div></div>	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>		

Description	Picture	Order Nr. & Specifications	<div> <div>Dock / R-Dock</div> <div>Dock Square</div> <div>FrameDock</div> <div>Port</div> <div>Port Push</div> <div>Vertical</div> <div>V-Dock</div> <div>U-Dock</div> </div>
Residual Current Device RCD/RCCB 2-pole, characteristic B, type A, frame: black Installation dimensions: 100 x 50 mm		9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA 9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
Circuit Breaker MCB 2-pole, characteristic B, frame: black Installation dimensions: 100 x 50 mm		9330 1140 0000 Rated current: 10 A 9330 1150 0000 Rated current: 13 A 9330 0400 0000 Rated current: 16 A	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
Surge Protector With optical indicator Installation dimensions: 50 x 50 mm		9331 4770 0000 rated leakage current 1,5 kA maximum leakage current 5 kA,	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
Overvoltage protector Model like WAGO WINSTA Midi or Wieland GST 18i3 Protection level $U_{P/L/N-PE}$ 1.5KV Pre-fusing max. 16A with indicator-LED		1599 0910 4100 Model WAGO WINSTA MIDI 1599 0910 4000 Model Wieland GST 18i3	<div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> <div>•</div> </div>
Specification Max.permanent voltage U_c : Rated voltage U_N : Combined surge U_{oc} : Protection level $U_{P/L/N-PE}$: Pre-fuse: Tripping time (L/N-PE) :	VDE 61643-11 255 V _{AC} /50 Hz 230 V _{AC} /50 Hz 6kV <= 1,5 kV max. 16 A < 100 ns		

Description	Picture	Order Nr. & Specifications	<div>/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /</div>
Overload Circuit Breaker* required for 3 sockets or more in USA, Canada, and Australia. 1-pole. Type: Sliding switch Installation dimensions: 25 x 50 mm		9330 5780 0000 USA / Canada 15 A, 125 V 9330 5840 0000 Australien 10 A, 250 V	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
Overload Fuse* required from the 2 nd outlet in Switzerland. 1 pole. Installation dimensions: 25 x 50 mm Colour: black		9331 8590 0000 Schweiz 10 A, 220 V~	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
Overload Circuit Breaker* Switch-on overload switch Installation dimensions: 25 x 50 mm		9332 1080 0000 Switzerland Fuse: 10 A, 230 V~ 9332 0380 6600 U.S.A. Fuse: 15 A , 125 V~	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>
Power Supply Module with Cable and Overload Circuit Breaker Plug Type: J		9332 1090 0000 Cable length 3 m mounted to product	<div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>

*Only available with sockets

/ Dock / R-Dock
/ Dock Square
/ FrameDock
/ Port
/ Port Push
/ Vertical
/ V-Dock
/ U-Dock /

Description	Picture	Order Nr. & Specifications					
Installation Space Profile with black plastic cover to enable later insertation of additional modules		9330 7990 0000 Dimensions: 15 × 50 mm	•	•	•	•	•
		9330 5620 0000 Dimensions: 25 × 50 mm	•	•	•	•	•
		9330 5630 0000 Dimensions: 50 × 50 mm	•	•	•	•	•
		9330 5640 0000 Dimensions: 75 × 50 mm	•	•	•	•	•
		9330 5650 0000 Dimensions: 100 × 50 mm	•	•	•	•	•
		9330 6390 0000 Dimensions: 150 × 50 mm	•	•	•	•	•
Labeling Field for individual labeling of modules Installation dimensions: 15 × 50 mm		9330 9000 0000 black	•	•	•	•	•
Cover Plate made of black plastic, provides distance between current modules, future changes are not possible		9330 7980 0000 Dimensions: 15 × 50 mm	•	•	•	•	•
		9330 0920 0000 Dimensions: 25 × 50 mm	•	•	•	•	•
		9330 0130 0000 Dimensions: 50 × 50 mm	•	•	•	•	•
		9330 0550 0000 Dimensions: 75 × 50 mm	•	•	•	•	•
		9330 0110 0000 Dimensions: 100 × 50 mm	•	•	•	•	•
		9330 7650 0000 Dimensions: 150 × 50 mm	•	•	•	•	•

How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. *



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System (this example: FrameDock).





Combination of Interchangeable Modules

Your usage requirements are as flexible as you are.


So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.

Single Modules

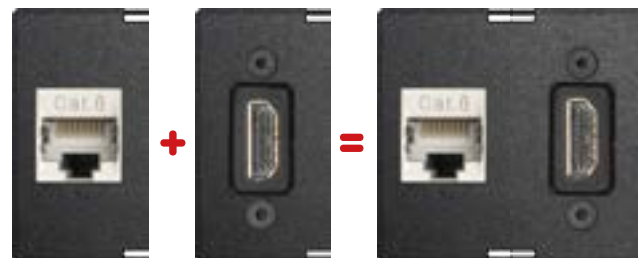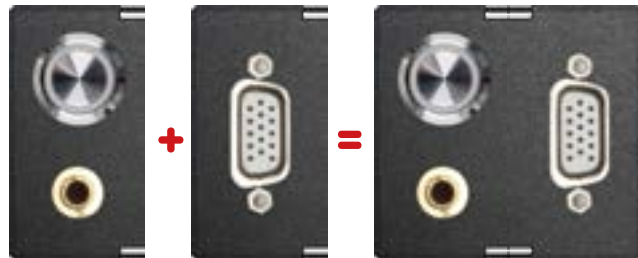


Interchangeable Modulee



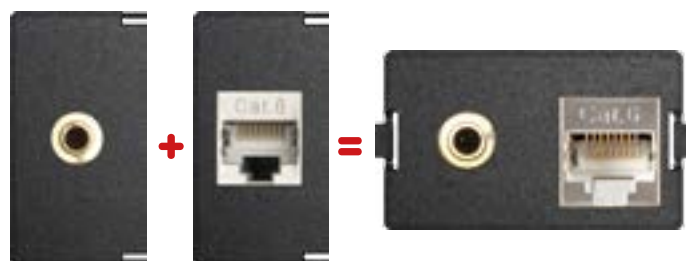



Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square









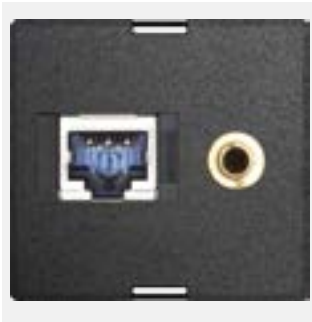


Examples for the configuration of the interchangeable Modules of Port Push

Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push			
Data Plate with Data socket ELBRO Modular adapter RJ45 to RJ45, 1:1 interconnected for Patch cable. 1/2 Module		9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable	●	●	●	●
		9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable	●	●	●	●
		9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable	●	●	●	●
Data Plate with Data socket Nexans With Cable, without dust cover. 1/2 Module		9331 8390 0000 RJ45 Cat6 shielded with 0.3 m cable and socket (RJ45)	●	●	●	●
		9331 8080 0000 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)	●	●	●	●
		9331 8370 0000 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)	●	●	●	●
		9331 8380 0000 GG45 Cat7 shielded with 3 m cable and plug (GG45)	●	●	●	●
Data Plate with Data socket Nexans With Cable, without dust cover, 1/1 Module		9331 8390 2200 RJ45 Cat6 shielded with 0.3 m cable and socket (RJ45)	●	●	●	
		9331 8080 2200 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)	●	●	●	
		9331 8370 2200 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)	●	●	●	
		9331 8380 2200 GG45 Cat7 shielded with 3 m cable and plug (GG45)	●	●	●	

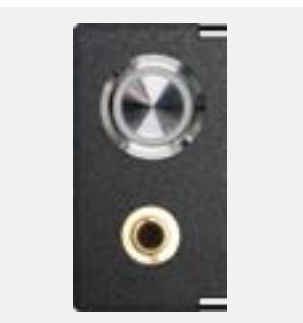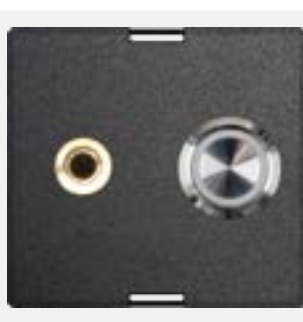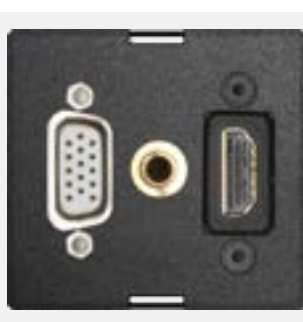

Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push			
Data Plate with Data Socket Reichle & De-Massari With Cable 1/2 Module		9331 8420 0000 RJ45 Cat6 shielded with 0,2 m Cable and Socket (RJ45)	●	●	●	●
		9331 8410 0000 RJ45 Cat6 unshielded with 3,0m Cable and Plug (RJ45)	●	●	●	●
		9331 8070 0000 RJ45 Cat6 shielded with 3,0m Cable and Plug (RJ45)	●	●	●	●
		9331 8400 0000 RJ45 Cat6A shielded with 3,0m Cable and Plug (RJ45)	●	●	●	●
Data Plate with Data Socket Reichle & De-Massari With Cable, 1/1 Module		9331 8420 2200 RJ45 Cat6 shielded with 0,2 m Cable and Socket (RJ45)	●	●	●	
		9331 8410 2200 RJ45 Cat6 unshielded with 3,0m Cable and Plug (RJ45)	●	●	●	
		9331 8070 2200 RJ45 Cat6 shielded with 3,0m Cable and Plug (RJ45)	●	●	●	
		9331 8400 2200 RJ45 Cat6A shielded with 3,0m Cable and Plug (RJ45)	●	●	●	

Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push			
VGA-Connector 15 pole HDD socket with screw connector, 1/2 Module		9331 8550 0000 with socket–socket (without cable) 9331 8430 0000 with 0.2 m cable and socket 9331 8100 0000 with 3 m cable and plug	•	•	•	•
VGA-Connector 15 pole HDD socket with screw connector 1/1 Module		9331 8550 2200 with socket–socket (without cable) 9331 8430 2200 with 0.2 m cable and socket 9331 8100 2200 with 3 m cable and plug	•	•	•	
Audio Connector 3,5 mm 1x Stereo Jack socket 3.5 mm, for analogue signals 1/2-Module		9331 8220 0020 with 0.2 m cable and socket 9331 82200 0000 with 3 m cable and socket 9331 8210 0000 with 0.2 m cable and plug with 3 m cable and plug	•	•	•	•
Audio Connector 3,5 mm 1x Stereo Jack socket 3.5 mm, for analogue signals 1/2-Module		9331 8220 2220 with 0.2 m cable and socket 9331 8220 2200 with 3 m cable and socket 9331 8210 2200 with 0.2 m cable and plug with 3 m cable and plug	•	•	•	

Description	Picture	Order-Nr. & Specifications	<div> <div>FlipTop Push</div> <div>FrameDock</div> <div>Dock Square</div> <div>Port Push</div> </div>
<p>Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>1/2 Module</p>		<p>9331 8870 0000 with Screw terminals</p> <p>9331 8850 0000 with 3 m cable and wire end ferrules</p>	<div> <div>● ● ● ●</div> <div>● ● ● ●</div> </div>
<p>Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>1/1 Module</p>		<p>9331 8870 2200 with Screw terminals und blauer Ring-LED</p> <p>9331 8850 2200 with 3 m cable and wire end ferrules</p>	<div> <div>● ● ●</div> <div>● ● ●</div> </div>
<p>Audio Connector with stainless steel push-button with blue ring-LED</p> <p>1 × stereo jack socket 3.5 mm for audio signals 1x Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA 1/2 Module</p>		<p>9331 8880 0000 Audio with 3 m cable and plug</p> <p>Push-Button with 3 m cable</p>	<div> <div>● ● ●</div> </div>
<p>Audio Connector with stainless steel push-button with blue ring-LED</p> <p>1 × stereo jack socket 3.5 mm for audio signals 1x Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA 1/2 Module</p>		<p>9331 8880 2200 Audio with 3 m cable and plug</p> <p>Push-Button with 3 m cable</p>	<div> <div>● ● ●</div> </div>
<p>HDMI-. VGA- and Audioconnector</p> <p>HDMI 1.4 socket with gilded Contacts and cable. 15 pole HDD VGA socket with cable. Stereo Jack socket with cable</p> <p>1/1-Module</p>		<p>9331 9000 0000 HDMI, VGA, Audio: Each with 3 m cable and plug</p> <p>9331 9410 0000 HDMI, VGA, Audio: Each with 0.2 m cable and socket</p>	<div> <div>● ● ●</div> <div>● ● ●</div> </div>



Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push			
Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari 1 × Stereo Jack socket, 1 × Data socket with Cable 1/2-Module		9331 8680 0000 Audio: Connector 3,5mm with 3 m cable and plug Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)	●	●	●	●
Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari 1 × Stereo Jack socket, 1 × Data socket with Cable 1/1-Module		9331 8680 2200 Audio: Connector 3,5mm with 3 m cable and plug Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)	●	●	●	
Audio-Connector 3,5 mm with CAT6-Data socket ELBRO 1 × Stereo Jack socket, 1 × Modular adapter RJ45 - RJ45, 1:1 interconnected for Patch cable 1/2 Module		9331 8690 0000 Audio: Connector 3,5 mm with 3 m cable and plug Data: RJ45 CAT6 shielded, socket to socket (RJ45), without cable	●	●	●	●
Audio-Connector 3,5 mm with CAT6-Data socket ELBRO 1 × Stereo Jack socket, 1 × Moduleadapter RJ45 - RJ45, 1:1 interconnected for Patch cable 1/1 Module		9331 8690 2200 Audio: Connector 3,5 mm with 3 m cable and plug Data: RJ45 CAT6 shielded, socket to socket (RJ45), without cable	●	●	●	





FlipTop Push
FrameDock
Dock Square
Port Push






Description	Picture	Order-Nr. & Specifications	
<p>Audio-Connector 3,5mm with Cat6 Data socket</p> <p>Nexans</p> <p>1x Stereo Jack socket, 1x Data socket with Cable 1/2 Module</p>		<p>9331 9210 0000</p> <p>Audio: Connector 3,5mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)</p>	<div><div></div><div></div><div></div><div></div></div>
<p>Audio-Connector 3,5mm with Cat6 Data socket</p> <p>Nexans</p> <p>1x Stereo Jack socket, 1x Data socket with Cable 1/1 Module</p>		<p>9331 9210 2200</p> <p>Audio: Connector 3,5mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)</p>	<div><div></div><div></div><div></div><div></div></div>

Description	Picture	Order-Nr. & Specifications	/ FlipTop Push / FrameDock / Dock Square / Port Push /			
DVI-I Connector Dual-Link, 24 + 5 pole , for digital and analogure signals. 1/2 Module		9331 8110 0000 with 0.2 m cable and socket 9331 8440 0000 with 3 m cable and plug with 5 m cable and plug	•	•	•	•
DVI-I Connector Dual-Link, 24 + 5 pole, for digital and analogure signals. 1/1 Module		9331 8110 2200 with 0.2 m cable and socket 9331 8440 2200 with 3 m cable and plug with 5 m cable and plug	•	•	•	•
HDMI-Connector HDMI 1.4 socket with gilded contacts 1/2 Module		9331 8540 0000 with socket – socket (without cable) 9331 8120 0000 with 0.3 m cable and socket 9331 8130 0000 with 3 m cable and plug with 5 m cable and plug	•	•	•	•
HDMI-Connector HDMI 1.4 socket with gilded contacts 1/1 Module		9331 8120 2200 with 0.3 m cable and socket 9331 8130 2200 with 3 m cable and plug with 5 m cable and plug	•	•	•	•

FlipTop Push
FrameDock
Dock Square
Port Push

Description	Picture	Order-Nr. & Specifications	
<p>Display Port-Connector</p> <p>DP 1.2 compliant. for transfer of digital signals</p> <p>1/2 Module</p>		<p>9331 8140 0000 with 0.4 m cable and socket</p>	<div><div></div><div></div><div></div><div></div></div>
<p>Display Port-Connector</p> <p>DP 1.2 compliant. for transfer of digital signals</p> <p>1/1 Module</p>		<p>9331 8140 2200 with 0.4 m cable and socket</p>	<div><div></div><div></div><div></div><div></div></div>

Description	Picture	Order-Nr. & Specifications	/ FlipTop Push / FrameDock / Dock Square / Port Push /			
USB-Connector 3.0 Type A for connection of USB standard consumer devices up to 5 GBit/s. 1/2-Module		9331 8530 0000 with socket – socket Type A 9331 8650 0000 with 0.2 m cable and socket Type A 9331 8460 0000 with 3 m cable and plug Type A	●	●	●	●
USB-Connector 3.0 Type A for connection of USB standard consumer devices up to 5 GBit/s. 1/1-Module		9331 8650 2200 with 0.2 m cable and socket Type A 9331 8460 2200 with 3 m cable and plug Type A	●	●	●	
USB-Connector 3.1 Type C USB 3.1 type C suitable for data and power. Max. current: 3W. 1/2 Module		9331 9720 0000 with 0.2 m USB cable and socket USB 3.1 Type C	●	●	●	●
USB-Connector 3.1 Type C USB 3.1 type C suitable for data and power. Max. current: 3W. 1/1 Module		9331 9720 2200 with 0.2 m USB cable and socket USB 3.1 Type C	●	●	●	

Description	Picture	Order-Nr. & Specifications	/ FlipTop Push / FrameDock / Dock Square / Port Push /			
<p>WireLane Adaptor for FlipTop Push</p> <p>to connect the WireLane to the FlipTop Push</p>		<p>9331 8700 0000 black</p>	•	•	•	•
<p>Cable Outlet Module</p> <p>for one cable like: Patch cable, audio cable etc.</p> <p>1/1 module</p>		<p>9331 8230 0000 Empty module, without cable</p>	•	•	•	
<p>Cable Outlet Module for Port Push</p> <p>for one cable like: Patch cable, audio cable etc.</p>		<p>9332 0100 0000 Empty module, without cable</p>	•			•
<p>Installation Space</p> <p>Profile to enable later insertation of additional modules</p>		<p>9331 8300 0000 50 mm Installation Space</p>	•	•	•	
<p>Installation Space for EVOLine Port Push</p> <p>Profile to enable later insertation of additional modules.</p>		<p>9332 1410 0000 40 mm Installation Space</p>				•

EVoline® Kinetics



Remote on/off control without cable or battery from a distance.




EVoline[®] Kinetics

EVoline Kinetics modules make it possible. Touching the switch with a finger generates enough energy to send an encoded wireless signal as far as 30 metres in enclosed spaces.

The EVoline receiver can be integrated into our products to switch electrical sockets. The transmitters can also be installed in EVoline products. Alternatively, they can be freely positioned with a mounting frame, minimizing costs and dirt during installation.



Dock / R-Dock
Dock Square
FrameDock
Port
Port Push
Vertical
V-Dock
U-Dock
—

Description	Picture	Order Nr. & Specifications					
Kinetics Wireless Receiver 2 pole module switching states ON/OFF, with display switching status, green 230 V actuator with switching capa- city of max. 16 A, switches devices such as lights, for EnOcean Alliance transmitters installation dimensions: 75 × 50 mm		9330 6400 0000 Module may be ordered in assembled products	●	●	●	●	●
Kinetics Wireless Transmitter Built-in module Controls all receivers of the EnOcean Alliance. Range up to 30 m. Installation dimensions: 50 × 50 mm		9330 6420 0000 with 1 rocker switch and 1 labeling window 9330 6410 0000 with 2 rocker switches and 2 labeling windows	●	●	●	●	●
Kinetics Wireless Transmitter with frame to switch on/off Controls all EnOcean receivers, range up to 30 m Installation dimensions: 60 × 65 mm		1599 0907 6900 with 1 rocker switch and 1 labelling window, black frame 1599 0907 8200 with 1 rocker switch and 1 labelling window, pure white frame 1599 0907 6800 with 2 rocker switch and 2 labelling window, black frame 1599 0907 8100 with 2 rocker switch and 2 labelling window, pure white frame	●	●	●	●	●



EVoline[®] Express



EVoline[®] Express

EVoline Express Type 910 for a consistent modular power supply provides a flexible number of power sockets. Self extinguishing plastics, sockets with contact protection and the testing of every single product before dispatch provides highest safety. Protection and switch modules are available as well.

International socket versions available. Various colours available.

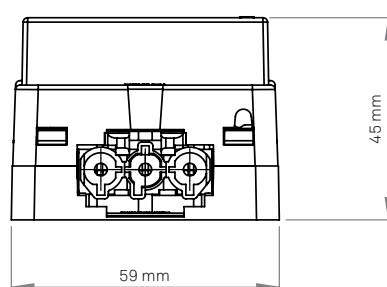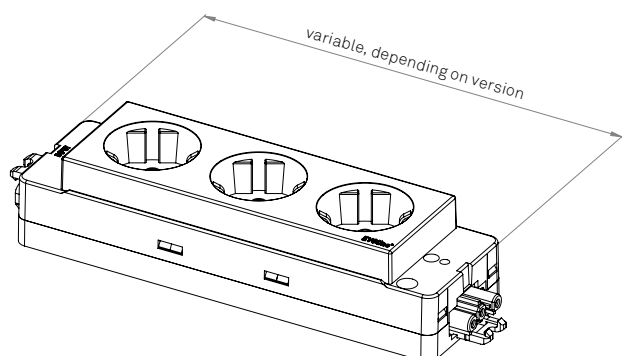

Connecting systems



Wieland GST 18i3
Plug



Wieland GST 18i3
Connector



WAGO WINSTA
Plug



WAGO WINSTA
Connector

Connectivity with EVOLine Express:





Technical Information for Express Type 910:





- Rated voltage: 230 V_{AC}
- Rated current: 16 A
- Halogen free housing
- Connectors for direct connection to each other (loop-through wiring)
- sockets redated through 30° (for example, allows the use of power supplies)
- Trough wiring (solid copper wire) 1.5mm²
- Low heat and high current carrying capacity through copper Contact rails
- Certified according to DIN VDE 0620-1
- Glow-wire test to IEC 60 695-2-11. Self-extinguishing. Flame retardant
- Each item individually tested with test report
- Test Modes: earth bond test. Continuity test. High voltage test
- socket housing: without screws or bolts



EVoline® Express Type 910

Description	Picture	Specifications	Order Number
EVoline Express lateral cover cap for screw holes (not suitable for Express Type 900 and 907)		Housing Colour black Housing Colour red	1591 1830 0400 1591 1830 0500
EVoline Express Type 910 2 gang Power Bar VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A Dimensions (HWL): 46 x 59 x 148 mm International versions available upon request.		Wieland GST 18 without contact protection Housing Colour black Housing Colour red contact protected Housing Colour black Housing Colour red	 1591 0200 0100 1591 0200 0120 1591 0200 0110 1591 0200 0130
EVoline Express Type 910 3 gang Power Bar VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A Dimensions (HWL): 46 x 59 x 198 mm International versions available upon request.		Wieland GST 18 without contact protection Housing Colour black Housing Colour red contact protected Housing Colour black Housing Colour red	 1591 0300 0100 1591 0300 0120 1591 0300 0110 1591 0300 0130
		WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red contact protected Housing Colour black Housing Colour red	 1591 0200 0200 1591 0200 0220 1591 0200 0210 1591 0200 0230
		Wieland GST 18 without contact protection Housing Colour black Housing Colour red contact protected Housing Colour black Housing Colour red	 1591 0300 0100 1591 0300 0120 1591 0300 0110 1591 0300 0130
		WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red contact protected Housing Colour black Housing Colour red	 1591 0300 0200 1591 0300 0220 1591 0300 0210 1591 0300 0230



Description	Picture	Specifications	Order Number
EVoline Express Type 910 4-fach Power Bar		Wieland GST 18	
VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A		without contact protection	
		Housing Colour black	1591 0400 0100
		Housing Colour red	1591 0400 0120
		contact protected	
		Housing Colour black	1591 0400 0110
		Housing Colour red	1591 0400 0130
Dimensions (HWL): 46 x 59 x 249 mm		WAGO WINSTA MIDI	
		without contact protection	
		Housing Colour black	1591 0400 0200
		Housing Colour red	1591 0400 0220
		contact protected	
		Housing Colour black	1591 0400 0210
		Housing Colour red	1591 0400 0230
EVoline Express Type 910 3 gang Power Bar with Switch		Wieland GST 18	
VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A		without contact protection	
		Housing Colour black	1591 0400 1100
		Housing Colour red	1591 0400 1120
		contact protected	
		Housing Colour black	1591 0400 1110
		Housing Colour red	1591 0400 1130
Dimensions (HWL): 46 x 59 x 249 mm		WAGO WINSTA MIDI	
		without contact protection	
		Housing Colour black	1591 0400 1200
		Housing Colour red	1591 0400 1220
		contact protected	
		Housing Colour black	1591 0400 1210
		Housing Colour red	1591 0400 1230


EVoline® Express Type 910

Description	Picture	Specifications	Order Number
EVoline Express Type 910 2 gang Power Bar VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A Dimensions (HWL): 46 x 59 x 148 mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0201 0100 1591 0201 0120 1591 0201 0200 1591 0201 0220
EVoline Express Type 910 3 gang Power Bar Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 46 x 59 x 198mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0301 0100 1591 0301 0120 1591 0301 0200 1591 0301 0220
EVoline Express Type 910 4-fach Power Bar Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 46 x 59 x 249mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0401 0100 1591 0401 0120 1591 0401 0200 1591 0401 0220
EVoline Express Type 910 3 gang Power Bar with Switch Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 46 x 59 x 249 mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0401 1100 1591 0401 1120 1591 0401 1200 1591 0401 1220



Description	Picture	Specifications	Order Number
EVoline Express Type 910 2 gang Power Bar Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A Dimensions (HWL): 46 x 59 x 148 mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0203 0100 1591 0203 0120 1591 0203 0200 1591 0203 0220
EVoline Express Type 910 3 gang Power Bar Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A Dimensions (HWL): 46 x 59 x 198 mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0303 0100 1591 0303 0120 1591 0303 0200 1591 0303 0220
EVoline Express Type 910 4 gang Power Bar Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A Dimensions (HWL): 46 x 59 x 249 mm		Wieland GST 18 without contact protection Housing Colour black Housing Colour red WAGO WINSTA MIDI without contact protection Housing Colour black Housing Colour red	 1591 0403 0100 1591 0403 0120 1591 0403 0200 1591 0403 0220



EVoline® Express Type 900 / 901





Description	Picture	Specifications	Order Number
EVoline Express Type 900 3 gang Power Bar Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 40 x 58 x 220 mm		Wieland GST 18 Housing Colour black Housing Colour red	 1590 0100 1500 1590 0100 1600
EVoline Express Type 901 3 gang Power Bar Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 39 x 59 x 186 mm		Wieland GST 18 Housing Colour black Housing Colour red	 1590 1100 1500 1590 1100 1600







Description	Picture	Specifications	Order Number
EVoline Express Type 911 2 gang Power Bar Great Britain with on/off switches Dimensions (HWL): 39 x 59 x 186 mm Optional: - with other single fuses - with 200mm ground conductor - with 3.15A oder 5A fuse - without switch		Wieland GST 18 Housing colour black Single fuse 3.15 A and Ground terminal Housing Colour red Single fuse 3.15 A and Ground terminal Housing Colour black Single fuse 5 A and Ground terminal Housing Colour red Single fuse 5 A and Ground terminal	 1591 1100 2500 1591 1100 2600 1591 2100 2500 1591 2100 2600

EVoline® Express Protection Modules

Description	Picture	Specifications	Order Number
<p>EVoline Express Interference Filter</p> <p>with integrated overvoltage protection.</p> <p>Rated voltage U_N 230 V_{AC/50 Hz}</p> <p>Rated discharge current 8/20 I_N / Total 5 kA / 15 kA</p> <p>Protection level U_{PL/N} ≤1,3 kV</p> <p>Protection level U_{PL/N PE} ≤1,5 kV</p> <p>Dimensions (HWL): 39 × 59 × 188 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 0112 7500 1592 0112 7600 1592 0112 7700 1592 0112 7800</p>
<p>EVoline Express RCD Residual current device switch</p> <p>25 A, sensivity 30 mA with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 4500 1592 2110 4600 1592 2110 4700 1592 2110 4800</p>
<p>EVoline Express MCB Circuit protection switch</p> <p>16 A, Characteristic B 2-pole with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 3500 1592 2110 3600 1592 2110 3700 1592 2110 3800</p>
<p>EVoline Express MCB Circuit protection switch</p> <p>10 A, Characteristic B 2-pole with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 2500 1592 2110 2600 1592 2110 2700 1592 2110 2800</p>

Description	Picture	Specifications	Order Number
<p>EVoline Express 3 gang ICE Power Socket</p> <p>10 A, according to ICE 320 / sheet C13</p> <p>Dimensions (HWL): 39 x 59 x 186 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 0110 4500 1592 0110 4600</p> <p>1592 0110 4700 1592 0110 4800</p>
<p>EVoline Express Type 907 3 gang Power Bar</p> <p>VDE-compliant, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A, 2 x telephone/data sockets RJ45 CAT 6</p> <p>Dimensions (HWL): 46 x 55 x 175 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black RJ45, CAT6 shielded</p>	<p>1590 7300 6500</p>




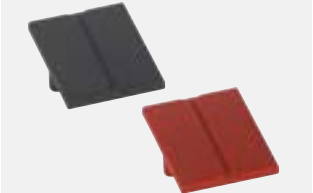

Description	Picture	Specifications	Order Number
EVoline Express Power Cord Germany, Austria,France with Angled plug and socket connector Colour: black		GST 18 (Connector) Cable length 3 m Cable length 4 m Cable length 5 m WAGO WINSTA (Connector) Cable length 3 m Cable length 4 m Cable length 5 m	 6590 0603 0500 6590 0604 0500 6590 0605 0500 6590 0903 0100 6590 0904 0100 6590 0905 0100
EVoline Express Power Cord Germany, Austria,France with Angled plug and socket connector Colour: red		GST 18 (Connector) Cable length 3 m WAGO WINSTA (Connector) Cable length 3 m Sonderlengthn ab 100 Stück auf Anfrage	 1590 0603 0600 1590 0903 0200
EVoline Express Power Cord Great Britain, 13 A with Angled plug and socket connector Colour: black		GST 18 (Connector) Cable length 3 m WAGO WINSTA (Connector) Cable length 3 m	 6591 1603 0500 1591 1903 0100
EVoline Express Power Cord Switzerland with safety plug and socket connector		GST 18 (Connector) Cable length 3 m, 10A Cable length 3 m, 16A WAGO WINSTA (Connector) Cable length 3 m, 10A Cable length 3 m, 16A	 1590 0623 0500 1590 0663 0500 1590 0923 0100 1590 0963 0100

Description	Picture	Specifications	Order Number
EVoline Express Connecting cable		Cable 3 x 1,5 mm², black Lenght - 1 meter (Minimum 0,2 meter)	9331 7920 0000
		Cable extension per meter (purchase from 0.1 m)	
		Cable 3 x 1,5 mm², red Lenght - 1 meter (Minimum 0,2 meter)	9331 7930 0000
		Cable extension per meter (purchase from 0.1 m)	
		Plug GST 18 Connector GST 18	9331 7940 0000 9331 7960 0000
		Plug WAGO WINSTA MIDI Connector WAGO WINSTA MIDI	9331 7950 0000 9331 7970 0000
EVoline Express Socket Connector		Plug GST 18 Connector GST 18	1599 0907 7000 1599 0905 9000
		Plug WAGO WINSTA MIDI Connector WAGO WINSTA MIDI	1599 0910 9500 1599 0910 9600

EVoline® Express Distribution System

Description	Picture	Specifications	Order Number
Distributor 1x Input, Plug 3-pole 2x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black		Wieland GST 18 T-Shape Voltage 250 V, 25 A	6599 0905 2200
		WAGO WINSTA Midi, T-Shape Voltage 250 V, 25 A	6599 0906 9100
Distributor 1x Input, Plug 3-pole 2x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black		Wieland GST 18, flat Shape Voltage 250 V, 20 A	6599 0906 8300
		WAGO WINSTA Midi, h-Shape Voltage 250 V, 25 A	6599 0906 9200
Distributor 1x Input, Plug 3-pole 3x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black		Wieland GST 18 Voltage 250 V, 20 A	6599 0905 2300
		WAGO WINSTA Midi Voltage 250 V, 25 A	6599 0906 9400

Description	Picture	Specifications	Order Number
Distributor 1x Input, Plug 3-pole 5x Output, Connector 3-pole, with lock, without Mounting clip		Wieland GST 18 Voltage 250 V, 20 A	6599 0905 2400
		WAGO WINSTA Midi Voltage 250 V, 25 A	6599 0906 9600
Distributor 1x Input, Plug 3-pole 3x Output, Connector 3-pole, with Lock, with Mounting clip Colour: black		Wieland GST 18 Voltage 250 V, 20 A	6599 0904 6200
Distributor 1x Input, Plug 3-pole 5x Output, Connector 3-pole, with Lock, with Mounting clip Colour: black		Wieland GST 18 Voltage 250 V, 16 A	6599 0904 5100
Y-Cable Distributor 1x Input, Plug 3-pole, GST18 2x Output, Connector 3-pole, GST18 with Lock, without Mounting clip Lenght: 300 mm Colour: black		Wieland GST 18 Voltage 230 V, 16 A	6599 0906 6600
Mounting bracket for fixing the distributors		WAGO WINSTA	6599 0906 9700

Description	Picture	Specifications	Order Number
EVoline Rail For under desk installation, for the EVoline Express range. Black plastic brackets. Black aluminium profiles		2 black plastic brackets with 2 aluminium profiles Profile length 165 mm (für 3 gang) Profile length 215 mm (für 4-fach)	1593 5400 0300 1593 5400 0400
		Individuell 1 black plastic brackets for EVoline Express	9331 6230 0000
		1 pair of Aluminium profiles per 100 mm	9331 6210 0000
EVoline Express Module Connector for a safe connection of plugged EVoline modules (for Express 901/910/911)		black red	1591 1830 0100 1591 1830 0200
EVoline Express GST18 latches Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.		black	1599 0909 6700

EV0line® Cable Management



Source to desk cable management.



EVoline[®] Cable Management



EVoline Cable Management organises and consolidates cables and ensures health and safety requirements in office spaces. The Bridge-System provides individual solutions for almost any request.






Connectors, 90° angled module, T-module and cross module allow cable routing on the floor as required, The vertical module is perfect for the clean transition between walls and furniture.

EVoline Wirelane provides a clean cable routing and can be connected to the EVoline Bridge via an available adaptor.





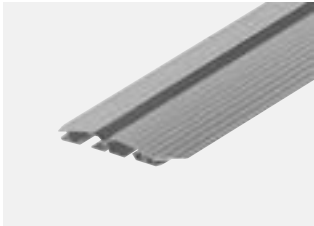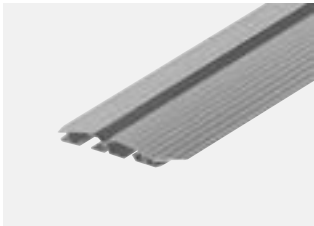

Description	Picture	Specifications	Order Number
<p>Empty Floor Outlet</p> <p>cable passage for installation in double and cavity floors, cover with bracket for EVOLine WireLane.</p> <p>Installation dimensions: Ø 125 mm</p>		<p>black</p> <p>lightgray</p>	<p>1594 9000 0000</p> <p>1594 9100 0000</p>
<p>Floor Outlet with electrical socket insert</p> <p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug GST18, cover with bracket for EVOLine WireLane</p> <p>Gray function insert.</p> <p>Installation dimensions: Ø 125 mm</p> <p>individual components to be ordered separately</p> <p>various country specific versions (different electrical socket inserts) available upon request</p>		<p>Cover black</p> <p>Cover lightgray</p>	<p>1594 9000 0100</p> <p>1594 9100 0100</p>


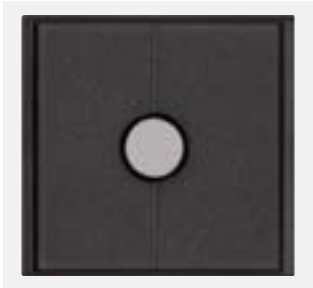
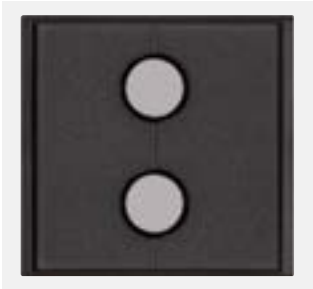

Description	Picture	Specifications	Order Number
Bridge Module Arc 90°* includes 4 Fixing bolts			1593 5090 0600
Bridge Module T* includes 6 Fixing bolts			1593 5090 0500
Bridge Module Kreuz* includes 8 Fixing bolts			1593 5090 0200
Bridge Module Adapter WireLane* can also be used as end piece.			1593 5090 0100
Bridge Module Vertikal*			1593 5090 0400
Bridge Verbindungen* 2 Pieces			1593 5090 0300

Description	Picture	Specifications	Order Number
EVoline Bridge cable cover made of aluminium fixed by screw, with black trim, without screws		4 CableClips Length: 500 mm Length: 800 mm Length: 1.200 mm 8 CableClips Length: 1.600 mm Length: 2.000 mm	1593 5010 5000 1593 5010 8000 1593 5011 2000 1593 5011 6000 1593 5012 0000
EVoline Bridge cable cover made of aluminium fixed by double sided adhesive tape, with black trim,		4 CableClips Length: 500 mm Length: 800 mm Length: 1.200 mm 8 CableClips Length: 1.600 mm Length: 2.000 mm	1593 5020 5000 1593 5020 8000 1593 5021 2000 1593 5021 6000 1593 5022 0000
EVoline WireLane under desk cable channel made of plastic One package consists of 3 pieces, 250-330 mm each. The elements can be linked and separated.		Colour: black Colour: lightgray	6593 5201 0000 6593 5211 0000
EVoline WireLane Strain Relief in black plastic, with two clamps for cable			6593 5290 0100
EVoline CableFlex Plastic tube for cables. Black, including tool		Ø 15 mm, Length 50 m Ø 20 mm, Length: 30 m Ø 25 mm, Length: 20 m	6593 5300 0100 6593 5310 0100 6593 5320 0100
EVoline CableFlex Insertion tool		Ø 15 mm Ø 20 mm Ø 25 mm	6593 5390 0100 6593 5390 0200 6593 5390 0300

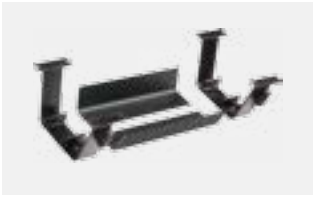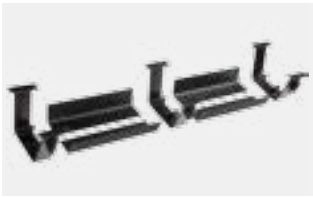EVoline® Bridge Module

Description	Picture	Specifications	Order Number
EVoline Rail For under desk installation, the EVoline Rail is available for the EVoline U-Dock and EVoline Express range. Bespoke profile lengths available upon request.		for EVoline U-Dock	
		2 black plastic brackets with 2 aluminium profiles	
		Profile length 150 mm	1593 5400 0700
		Profile length 300 mm	1593 5400 0100
		Profile length 500 mm	1593 5400 0200
		3 black plastic brackets with 4 aluminium profiles	
		Profile length 2 x 300 mm	1593 5400 0500
		Profile length 2 x 400 mm	1593 5400 0600
		For EVoline Express	
		2 black plastic brackets with 2 aluminium profiles	
		Profile length 165 mm (for 3-gang)	1593 5400 0300
		Profile length 215 mm (for 4-gang)	1593 5400 0400
		Individuell	
		1 black plastic brackets for EVoline Express	9331 6230 0000
		1 black plastic brackets for EVoline U-Dock	9331 6220 0000
		1 Pair Aluminium profiles per 100 mm	9331 6210 0000
		Maximum length: Length U-Dock-Profile - 100mm	

* Be retrofitted to all EVoline Bridges already delivered

Description	Picture	Specifications	Order Number
Cable Passage EVoline Port Aluminium housing, silver anodised. For surface thickness up to 50 mm. Without modules. Mounting hole \varnothing 102 mm.		Rocking cover and collar made of silver lacquered plastic	1593 1002 5301
		Rocking cover and collar made of black lacquered plastic	1593 1003 2601
		Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match	1593 1003 2701
Cable Outlet-Modul 1 cable passage Cables are able to be easily adjusted and stored through the inserts. installation dimensions: 50 x 50 mm		\varnothing 8mm	9331 3790 0000
		\varnothing 12mm	9331 0560 0000
		\varnothing 17mm Other \varnothing on request	9331 1670 0000
Cable Outlet-Modul 2 cable passages Cables are able to be easily adjusted and stored through the inserts. Installation dimensions: 50 x 50 mm		\varnothing 8mm	9331 3800 0000
		\varnothing 12mm	9331 1930 0000
		Other \varnothing on request	
Cable Guide-Modul for EVoline Port Clamp for 3 cables. \varnothing 2 x 8 mm, 1 x 12 mm Colour: black Installation dimensions: 25 x 50 mm			9331 3600 0000

EVOnline® Accessories









Custom-made






EVoline[®] Accessories

There is a variety of fixings and mounting accessories available for use with EVoline connectivity systems. Whether for a simple power and data unit or a customised individual item the available options provide secure fixing solutions with effortless installation.



Description	Picture	Specifications	Order Number
Mounting Clamp twist-proof including non-slip covering Colour: black for profiles: Dock, U-Dock, R-Dock		Span width 8 - 40 mm Span width 8 - 40 mm, 2 items Span width 40 - 75 mm Span width 40 - 75 mm, 2 items	1599 0902 1200 1599 0902 0500 1599 0902 1300 1599 0902 1000
Mounting Clamp twist-proof including non-slip covering Colour: white for profiles: Dock, U-Dock, R-Dock		Span width 8 - 40 mm Span width 8 - 40 mm, 2 items Span width 40 - 75 mm Span width 40 - 75 mm, 2 items	1599 0909 3300 1599 0909 5600 1599 0909 3900 1599 0909 5700
Stainless Steel Mounting Clamp twist-proof desk clamp for EVoline profiles, installed and secured with allen screws For profiles: Dock, U-Dock, R-Dock		For Tabletops - width 25 mm	1599 0909 1500
Mounting set for under cabinet installation consists of two EVoline Dock brackets with wood screws screw: 3.5 x 15 mm			1599 0903 8300
Mounting set for desk installation consists of two EVoline Dock brackets with wing nut screws screw: M4 x 40 mm			1599 0903 8200

Description	Picture	Specifications	Order Number
Stainless Steel Pillar high quality anti-theft device for EVoline Dock consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock		Material : Stainless steel for surface thickness up to 50 mm	1599 0906 0700
Angle Profile for fixing of EVoline V-Dock		Length: 100 mm Length: 60 mm	1599 0908 4400 1599 0909 6400
EVoline Quicklock Pro fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay for profiles: EVoline Dock, EVoline R-Dock		Length: 100 mm length: 150 mm includes bracket for EVoline WireLane connection length: 200 mm includes bracket for EVoline WireLane connection	1599 0910 8500 1599 0910 8300 1599 0910 8400
		Mounted on product	
		profile min. length: 100 mm price unit: 100 mm	9331 6700 0000
		Fastening element	9332 0300 0000
		WireLane bracket usable from 150 mm profile length	9331 6720 0000

Description	Picture	Specifications	Order Number
Double Sided Strip for EVoline Dock Square 2× Double Sided Strips Removable without residue.			9332 1050 0000
EVoline Rubber gasket fits under the collar of the EVoline Port.			1599 0903 9100
EVoline Laptop Secure Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.		Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm	9331 3140 0000
EVoline Laptop Secure Sturdy attachment loop for stan- dard laptop theft protection Such as Kensington Lock.		Silver-colored	9331 6030 0000
EVoline Hole Saw		Mounting hole Ø 102 mm Mounting hole Ø 80 mm	1599 0901 7000 1599 0910 1000

EVOLine®

Schulte Elektrotechnik GmbH & Co. KG

Jüngerstraße 21
D - 58515 Lüdenscheid

Telefon	+49 23 51 / 94 81 - 0
Fax	+49 23 51 / 4 26 58
e-mail	info@schulte.com
Internet	www.evoline.com

schulte invented and made by
elektrotechnik Schulte Elektrotechnik,
Lüdenscheid, Germany

